



User Manual

Version 1.4.1 September 2026

GRP-2841M-5GE

5G Edge Computing Controller



Table of Contents

1. Introduction	5
2. Hardware Specification.....	6
2.1 GRP-2841M-5GE Specifications.....	6
2.2 Accessories Specifications.....	7
3. Application Architecture.....	8
3.1 5G Wireless Router.....	8
3.2 Remote Video Monitor	8
3.3 Serial Port Gateway Application	9
3.4 Node-RED Application	9
4. Hardware.....	10
4.1 Appearances.....	10
4.2 Dimension	11
4.3 LED Indicators	12
4.4 Rotary Switch.....	12
4.5 Mounting the Expansion Components	13
4.5.1 Mounting the communication module	13
4.6 Install the SIM card	16
4.7 Installing the antenna.....	18
5. Web Utility.....	20
5.1 Login the Utility	20
5.2 Information	20
5.2.1 Device Information.....	20
5.2.2 Network Information	21
5.2.3 Storage Information	23
5.3 Network.....	23
5.3.1 Ethernet.....	23
5.3.2 WLAN	24
5.3.3 PIN / APN Configure.....	24

5.3.4	Network Reconnection	24
5.3.5	DNS.....	25
5.3.6	DDNS Client	25
5.3.7	VPN.....	26
5.3.8	DHCP Server.....	28
5.3.9	Routing & Port Mapping & White list.....	29
5.3.10	Diagnostic.....	31
5.3.11	Reset Network.....	32
5.4	System.....	33
5.4.1	Password.....	33
5.4.2	Reboot.....	33
5.4.3	Reboot Timer	33
5.4.4	Backup & Restore.....	34
5.4.5	Update	34
5.4.6	Restore Factory	35
5.4.7	Time.....	35
5.5	VxServer	36
5.5.1	VxServer.....	36
5.6	RTU Client	38
5.6.1	RTU Client.....	38
5.6.2	FTP Test	42
5.6.3	Email Test.....	42
5.6.4	Modbus Test	43
6.	Example	45
6.1	5G Router Application	45
6.2	Web Server and IP Camera Application.....	48
6.3	Remote I/O Control / Temperature Monitor	52
6.4	Modbus TCP to Modbus RTU over 5G	58
6.5	RTU Client for Remote Control Application with RTU API.....	62
6.6	RTU Client for Remote Control Application with OPC DA Server.....	73
6.7	RTU Client for Remote Control Application with InduSoft.	75
6.8	Email or FTP report I/O logger file.....	77
Appendix A. Revision History		80

Important Information

Warranty

All products manufactured by ICP DAS are under warranty regarding defective materials for a period of one year, beginning from the date of delivery to the original purchaser.

Warning

ICP DAS assumes no liability for any damage resulting from the use of this product. ICP DAS reserves the right to change this manual at any time without notice. The information furnished by ICP DAS is believed to be accurate and reliable. However, no responsibility is assumed by ICP DAS for its use, not for any infringements of patents or other rights of third parties resulting from its use.

Copyright

Copyright © 2024 by ICP DAS Co., Ltd. All rights are reserved.

Trademark

Names are used for identification purpose only and may be registered trademarks of their respective companies.

Contact us

If you have any problem, please feel free to contact us. You can count on us for quick response.

Email: service@icpdas.com

1. Introduction

The GRP-2841M-5GE provided by ICP DAS is a 5G Edge Computing Controller. GRP-2841M-5GE can become a wireless router through its built-in 5G communication module, providing Ethernet and Wi-Fi (option) data transmission. It also has built-in GPS/GNSS functionality and can also be used as a GPS tracking system for vehicle management or marine systems. GRP-2841M-5GE supports Node-RED (flow-based programming tool), Users can create user control logic for field requirements through Node-Red. The GRP-2841M-5GE can process a large amount of data in a high-performance CPU and is suitable for harsh industrial environments.



2. Hardware Specification

2.1 GRP-2841M-5GE Specifications

Models	GRP-2841M-5GE
Software	
OS	Linux Kernel 4.14.98
Service	SSH, FTP, Web Server, SMTP, SNMP, DDNS
Function	NAT and port forwarding function Remote Terminal Unit (RTU) Multiport serial gateway 5G wireless router (option)
Main Unit	
CPU	Cortex-A53 CPU, 1.6 GHz, quad-core
System Memory	1 GB LPDDR4 SDRAM
Storage	8 GB eMMC Flash, 32 GB microSD card
Non-Volatile Memory	64 KB FRAM; 128 KB MRAM
Real Time Clock	Provide seconds, minutes, hours, dates, day of week, month, year
Watchdog Timer	Yes
64-bit Hardware Serial Number	Yes, for software copy protection
LED Indicators	6 LEDs (PWR, NET, RUN, L1, L2, L3)
Rotary Switch	1 x 10 Position (0 ~ 9)
3G System	
Frequency Band	WCDMA: B1/B2/B3/B4/B5/B6/B8/B19
4G System	
Frequency Band	FDD: B1/B2/B3/B4/B5/B7/B8/B12(B17)/B13/B14/B18/B19/B20/B25/B26/B28/B29/ B30/B32/B66/B71 TDD: B34/B38/B39/B40/B41/B42/B48
5G System	
Frequency Band	n1/n2/n3/n5/n7/n8/n12/n20/n28/n41/n66/n71/n77/n78/n79
Communication Ports	
Ethernet	2 x RJ-45, 10/100/1000 Based-TX (Auto-negotiating, Auto MDI/MDI-X, LED indicators)
USB 2.0 (host)	2
Console	RS-232 (RxD, TxD and GND); Non-isolated
COM 1	RS-232 (RxD, TxD and GND); Non-isolated
COM 2	RS-485 (Data+, Data-); 2500 VDC isolated
COM 3	RS-485 (Data+, Data-); 2500 VDC isolated
Mechanical	
Casing	Metal
Dimensions (W x L x H)	35 mm x 167 mm x 119 mm
Ingress Protection Rating	IP30 (Aluminum)
Installation	DIN-Rail Mounting
Environment	

Operating Temperature	-25 ~ +70°C
Storage Temperature	-30 ~ +80°C
Ambient Relative Humidity	10 ~ 90% RH, Non-condensing
Power	
Input Range	+12 ~ 48 VDC
Consumption	9.6 W (0.4 A @ 24 VDC)

2.2 Accessories Specifications

About the Wi-Fi Module

Module (Optional)	RYWDB00	M2-JODY-W377-00C
Wi-Fi		
Standard	IEEE 802.11a/b/g/n	IEEE 802.11a/b/g/n/ac/ax
Mode	Wi-Fi Access Point Wi-Fi Client	Wi-Fi Access Point Wi-Fi Client
Data Transmission Rate	802.11b: 1, 2, 5.5, 11 Mbps 802.11g/a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS0 to MCS7	802.11b: 1, 2, 5.5, 11 Mbps 802.11g/a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS0 to MCS15 and MCS32 802.11ac: MCS0~MCS9 802.11ax: MCS0~MCS11
Frequency Range	2412 MHz – 2484 MHz 4.9 GHz – 5.975 GHz	2.400 GHz – 2.500 GHz 4.900 GHz – 5.925 GHz
Transmit Power	2.4 GHz: 18 dBm, 5 GHz: 13.5 dBm	2.4 GHz: 19 dBm, 5 GHz: 16 dBm
Receive Sensitivity	2.4 GHz: -96.5 dBm, 5 GHz: -89 dBm	2.4 GHz: -97 dBm, 5 GHz: -90 dBm
Encryption	WPA/WPA2	Open / WPA / WPA2 / WPA3
Client for AP mode	Max. 16 Clients	Max. 64 Clients
Environment		
Operating Temperature Range	-40°C ~ +85°C	-40°C ~ +85°C
Dimensions	30.0mm × 26.8mm × 3.0mm	22.0mm × 30.0mm × 4.2mm

For further information, please refer to

<https://www.icpdas.com/en/product/guide+Wireless+Communication+Wi-Fi+Wi-Fi+Module>

About GPS antennas, there are the following options

Model	Ant. Type	Employment	Band
ANT-115-P1	Passive antenna (GPS)	5G Modem	1575.42±5MHz

For further information, please refer to

<https://www.icpdas.com/en/product/guide+Accessories+Antennas+Antenna#1232>

3. Application Architecture

3.1 5G Wireless Router




3.2 Remote Video Monitor



3.3 Serial Port Gateway Application




3.4 Node-RED Application

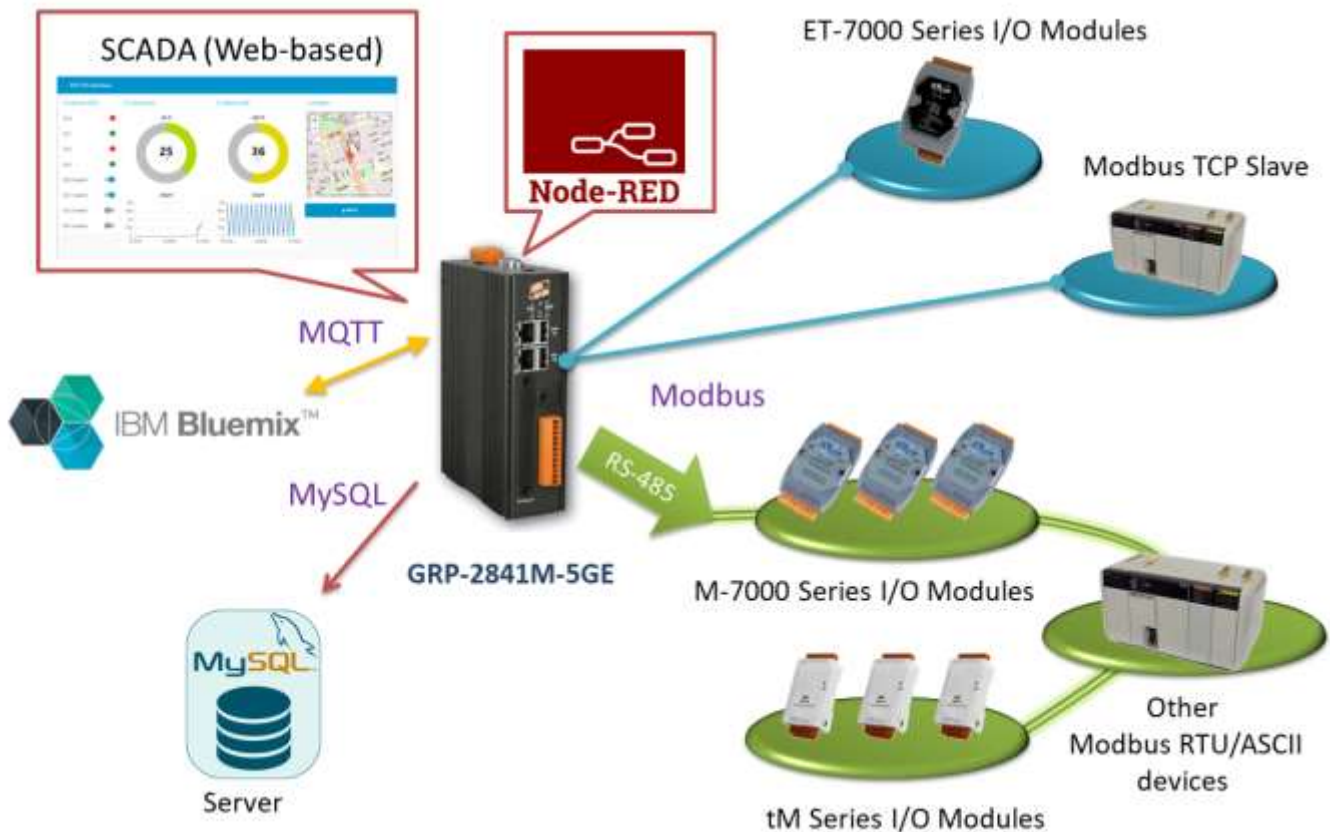


*About Node-RED, please download Node-RED package from <https://www.icpdas.com/en/download/index.php?model=GRP-2841M-5GE> for detail. The Node-RED package includes demos, manuals, and patch file.

4. Hardware


4.1 Appearances

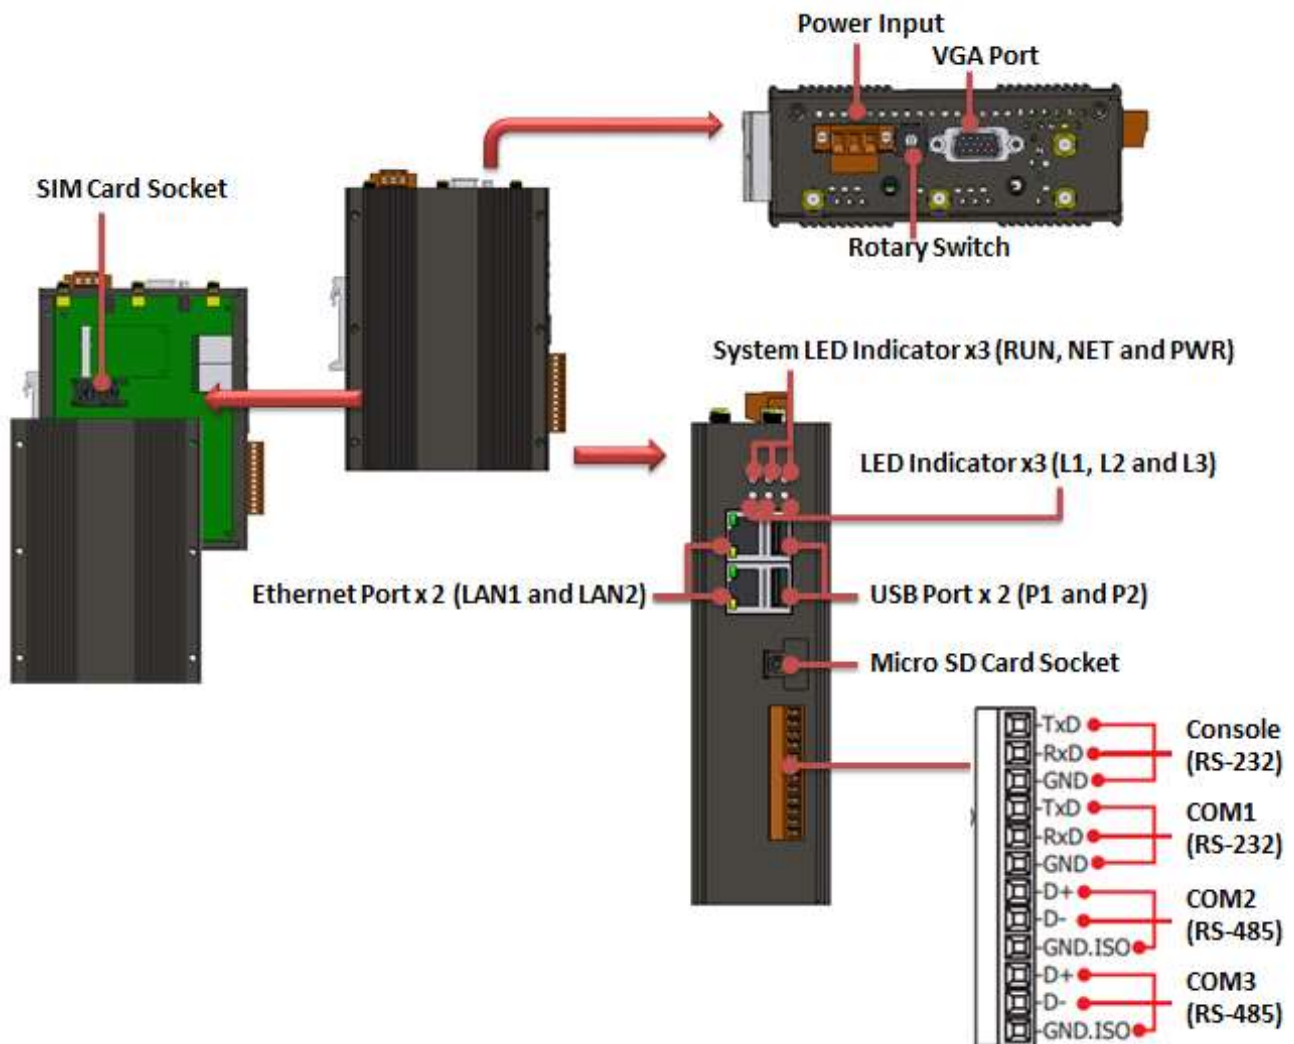

4.2 Dimension

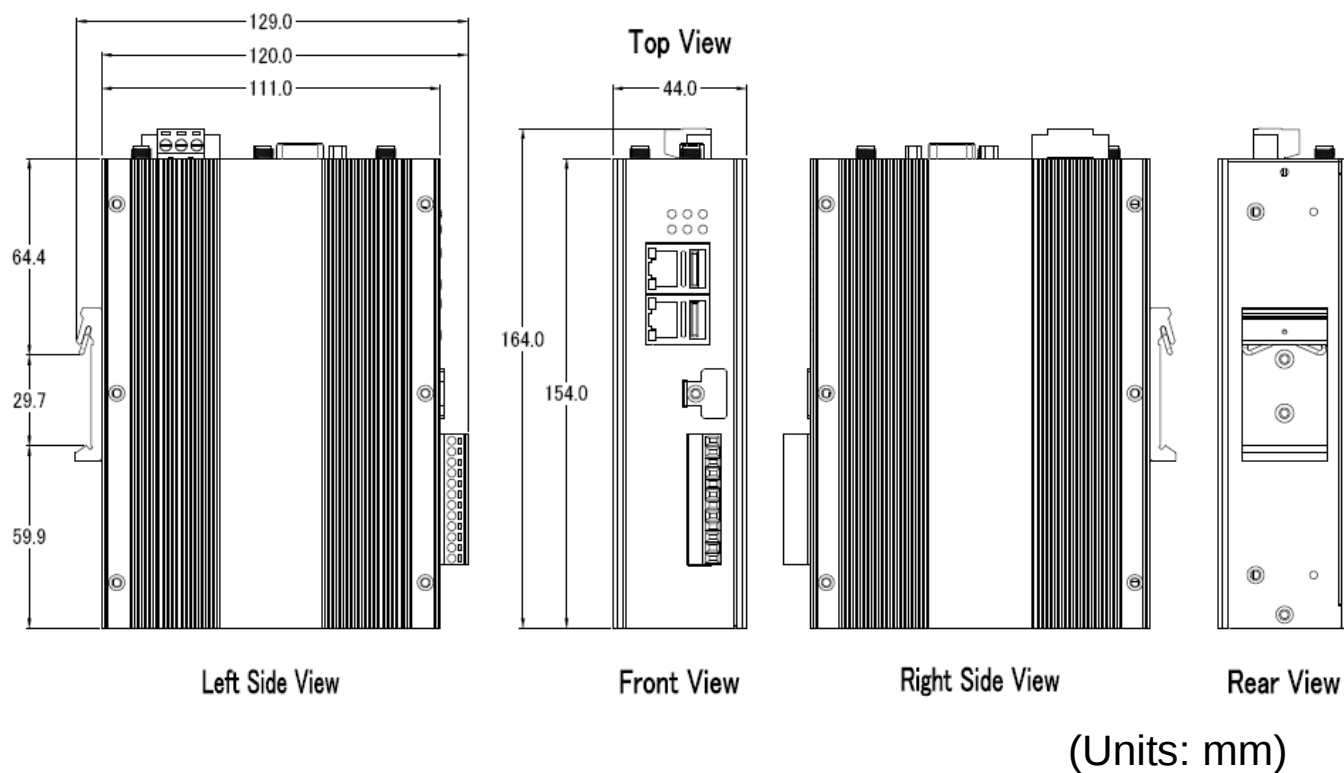

4.3 LED Indicators



LED Indicator	Color	Meaning
RUN	Green	Power on and OS is running (Normal is blinking)
NET	Orange	5G status indicator
PWR	Red	Power is on
L1	Green	The status of RTU Client (Normal is blinking)
L2	Orange	Reserve
L3	Red	Reserve

● NET LED

Modem	LED	Status
RM500Q / RM520N	ON	OK
(5G Modem)	OFF	Failed


4.4 Rotary Switch

There are some functions of rotary switch. The description is as follows :

- (1) **0** : Normal mode, default position.
- (2) **9** : If the user sets the rotary switch to 9 and then restarts the device, the Ethernet IP will be set to "192.168.255.1". It is useful when users forget the Ethernet IP.


4.5 Mounting the Expansion Components

GRP-2841M-5GE has two MiniPCle sockets and one M.2 socket to expand the wireless communication function. If you want to install the Wi-Fi module, please refer to the following installation steps for installation requirements.

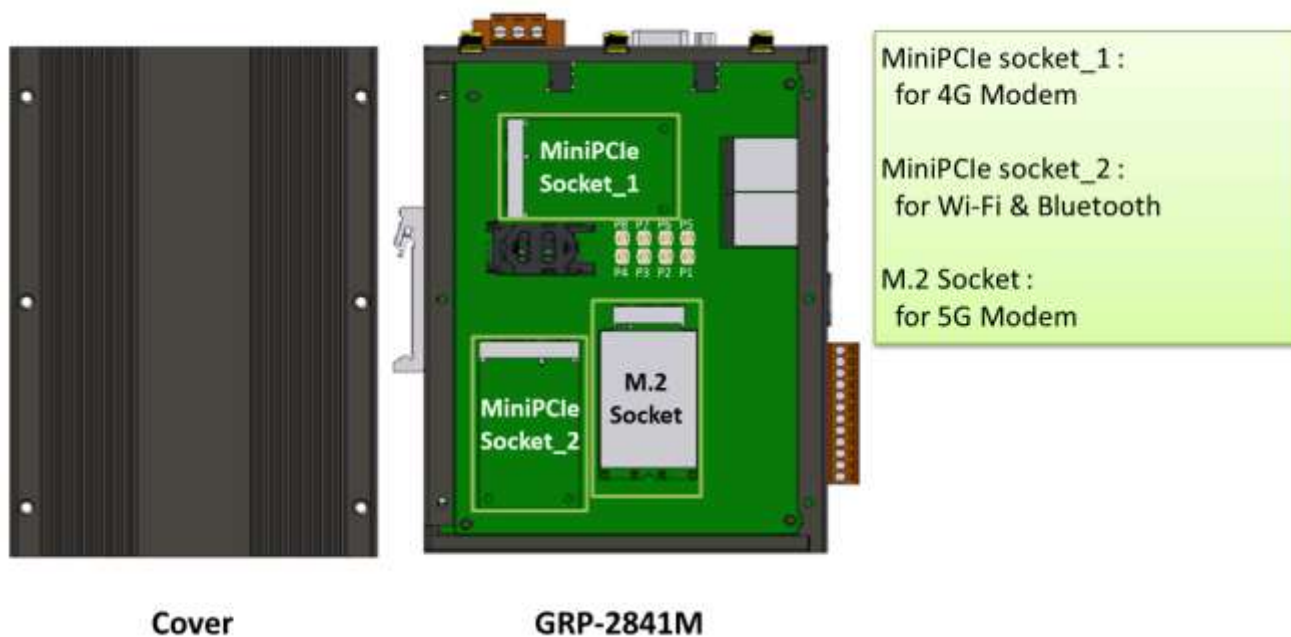

4.5.1 Mounting the communication module


- (1) Remove stripped screws and then remove the cover

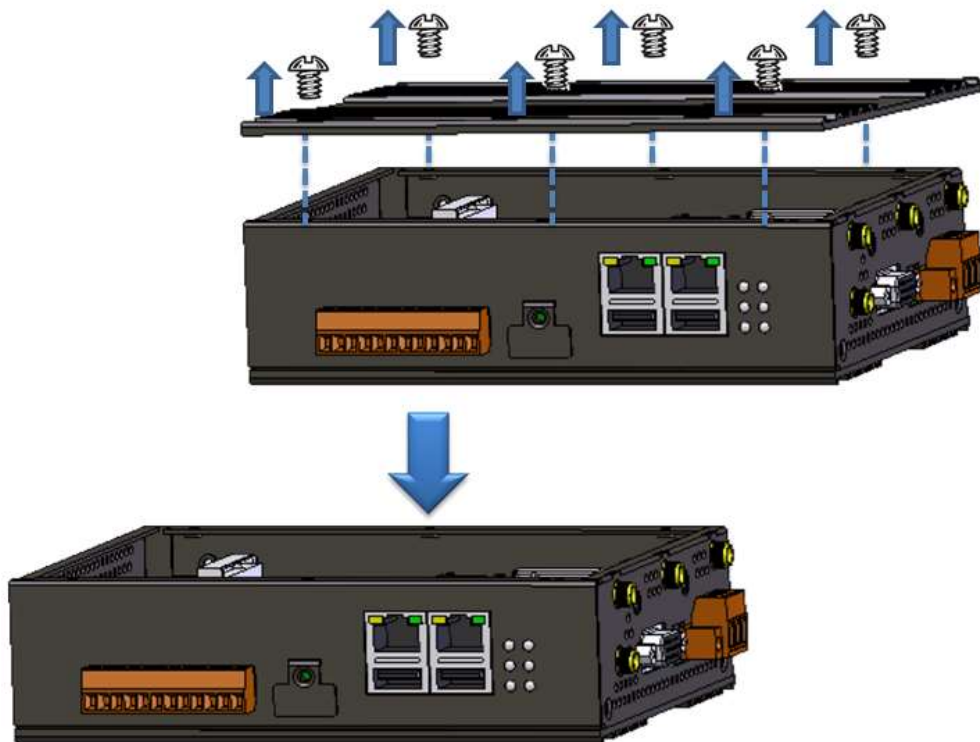


(2) Hold the communication module , and then carefully insert it into the socket.

- If the communication module is RYWDB00 (Wi-Fi module), please plug it into the MiniPCIe socket_2.

(3) Fasten the communication module using the screws supplied.

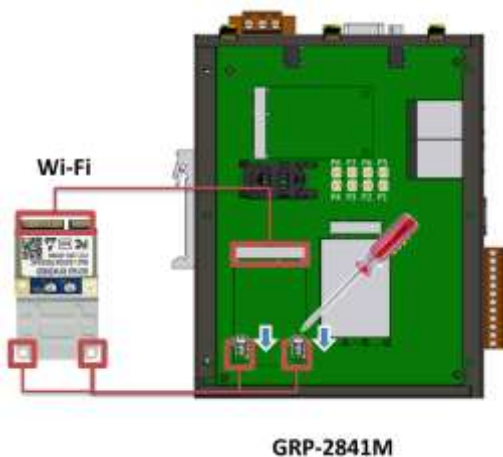

(4) Connect the communication module using the ipex cable supplied

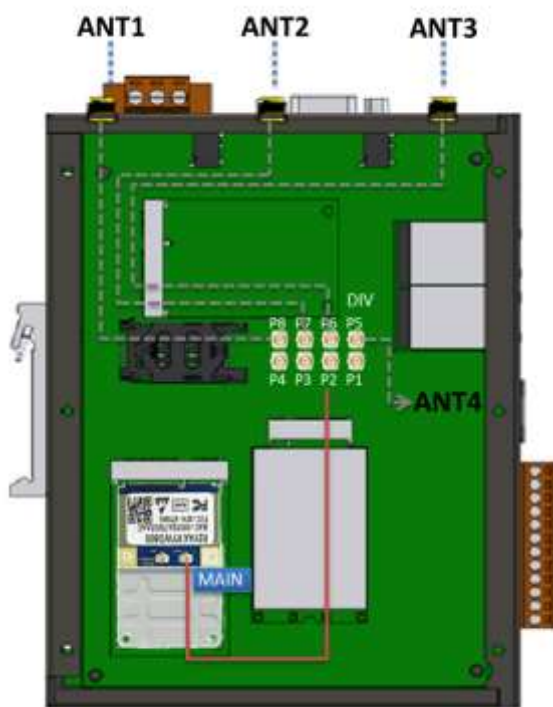

Left Side View

Wiring

pre-configured
user wiring


RYWDB00(Wi-Fi) -> GRP-2841M

MAIN -> P2 (ANT3)(Default)


-> P3 (ANT2)

-> P4 (ANT1)

* Select P2/P3/P4 to install wiring

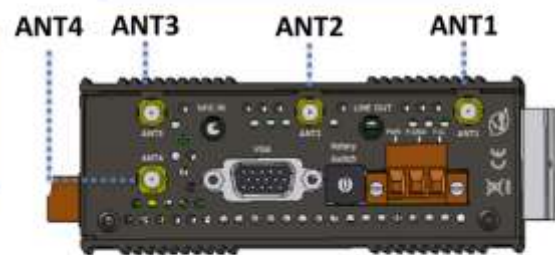

Top View

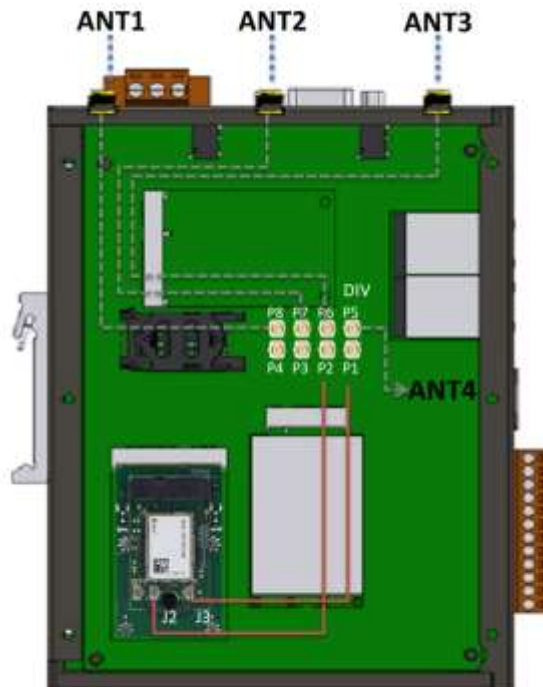

Left Side View

Wiring


pre-configured
user wiring

M2-JODY-W377-00C(Wi-Fi) -> GRP-2841M

J2 -> P2 (ANT3)

J3 -> P1 (ANT4)

* Two antennas must be installed

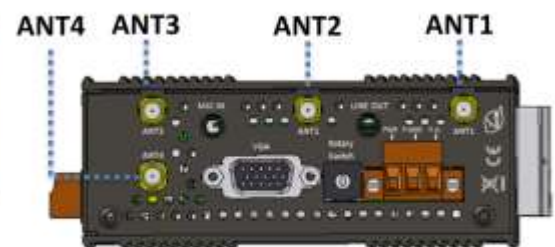


Top View

(5) Install Thermal Silicone Sheet.




(6) Close the cover and then fasten the screws.

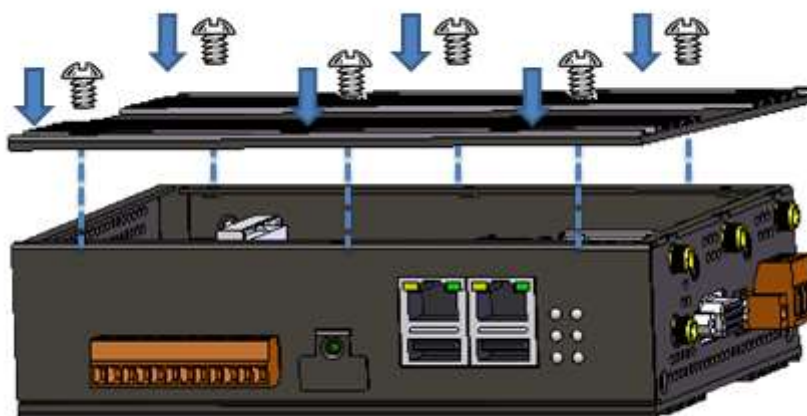

4.6 Install the SIM card


Before using mobile communication, users need to install a SIM card. Please follow the steps.

(7) Remove stripped screws and then remove the cover

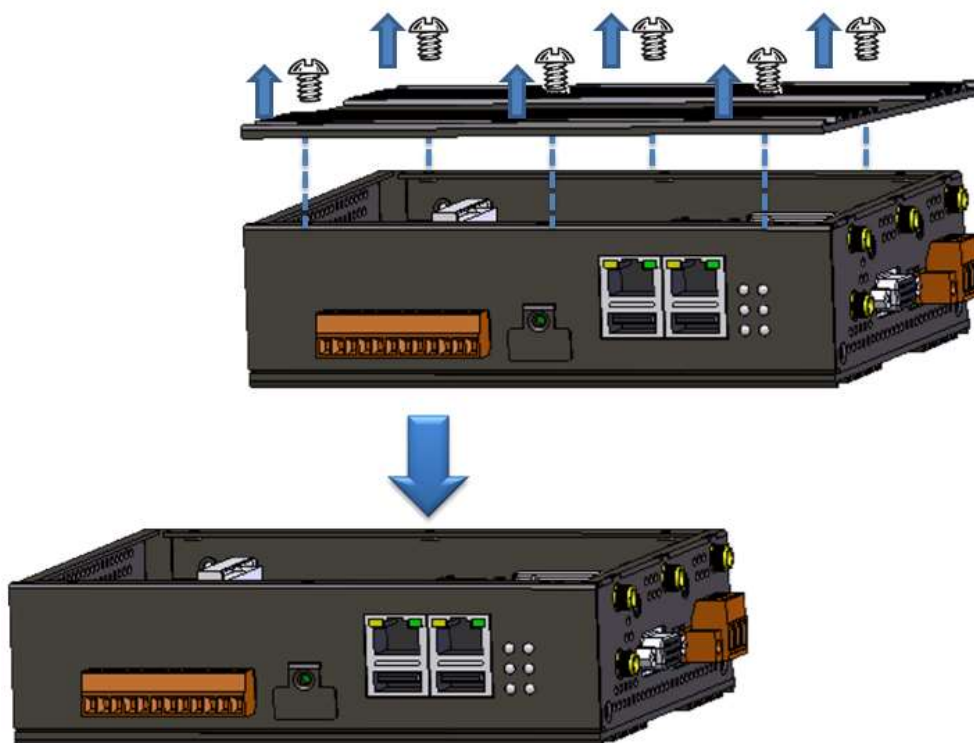


(8) Insert the SIM card

**SIM Card Socket
(Install SIM Card here)**

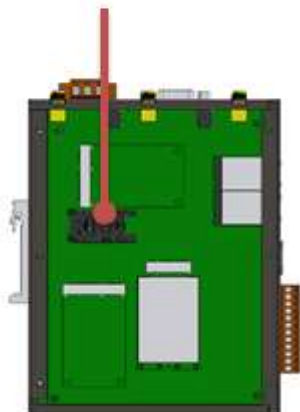


(9) Close the cover and then fasten the screws.

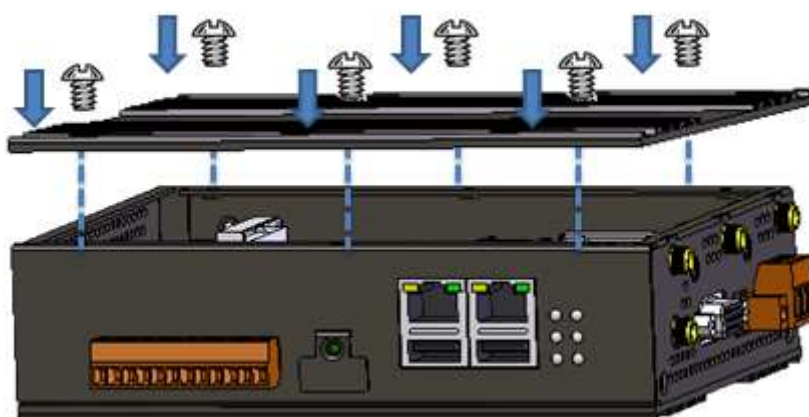

4.7 Installing the antenna

GRP-2841M-5GE has four antenna ports, which can be used to connect 5G and GPS antennas. To install the antenna, simply screw the antenna into the connector and place the antenna in the designated position.

GRP-2841M-5GE
ANT1 -> 5G Ant.
ANT2 -> 5G Ant.
ANT3 -> 5G Ant.
ANT4 -> 5G / GNSS Ant.

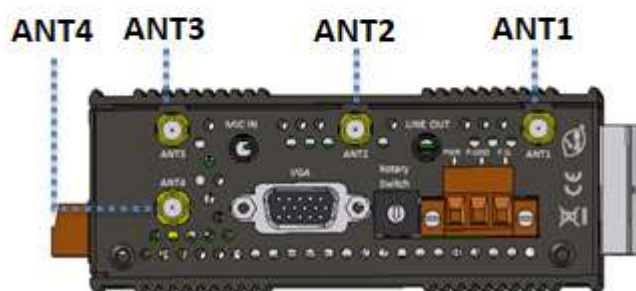

Regarding 5G antennas, there are the following options

Model	Employment	Band
ANT-859-01	4G/5G Modem and Wi-Fi Module	617~798MHz 803~960MHz

		1166-1610MHz 1710-2200MHz 2300-2690MHz 3300-3800MHz 4200-5000MHz 5150-5925MHz
---	--	--

Regarding GPS/GNSS antennas, there are the following options

Model	Ant. Type	Employment	Band
ANT-115-P1 	Passive Antenna (GPS)	5G Modem	1575.42±5MHz

For further information, please refer to

<https://www.icpdas.com/en/product/guide+Accessories+Antennas+Antenna#1232>


5. Web Utility

5.1 Login the Utility

Please login before using the web utility:

- Default IP is “192.168.255.1”.
- Default Mask is “255.255.0.0”.
- Default username is “admin”.
- Default password is “admin_GRP”.

When a user logs in with the default password, the web interface automatically redirects to the Change Password page. The user must set a new password before making any configuration changes. Until the password is changed, all configuration functions are disabled.

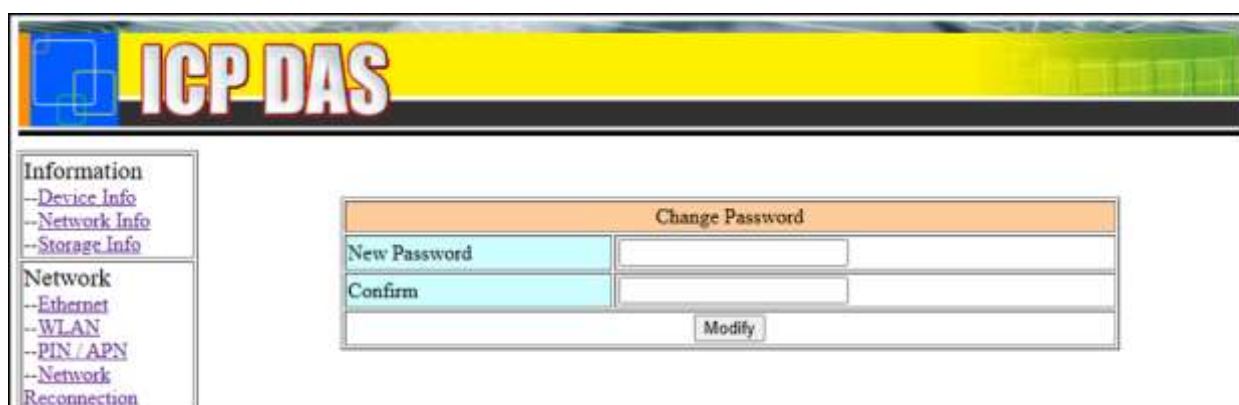

The screenshot shows the ICP-DAS web utility interface. On the left is a navigation menu with links for Information (Device Info, Network Info, Storage Info), Network (Ethernet, WLAN, PIN/APN, Network Reconnection), and a status bar at the bottom. The main content area is titled 'Change Password' and contains two input fields: 'New Password' and 'Confirm'. Below these fields is a 'Modify' button.

5.2 Information

5.2.1 Device Information

The “Device Information” page provides basic device information.

Device Information	
Serial Number	CCA4B6B10000
Kernel Version	4.14.98-imx_4.14.98_2.0.0_ga+g5d6cbea
Firmware Version	GRP-2841M_V1.0.0_20210927

- Serial Number: Serial number of ICPDAS product.
- Kernel Version: Linux kernel version.
- Firmware Version: Firmware version.

5.2.2 Network Information

The “Network Information” page provides basic network information.

Ethernet0	
Mode	static
MAC address	00:0d:e0:c0:00:08
IP Address	192.168.255.1
Mask	255.255.0.0
Ethernet1	
Mode	static
MAC address	00:0d:e0:c0:00:02
IP Address	10.0.255.1
Mask	255.255.255.0

WLAN information	
Mode	Closed

Mobile Network information	
Status	connected
IP Address	10.60.65.17

Modem information	
IMEI	861107030276449
PIN Code	+CPIN: READY
Register Status	Registered
Signal Quality	62%

GPS information	
GPS Status	GPS is ready, @(22.6202772833, 120.30106635) --> show map
GPS Data	\$GPRMC,012958.0,A,2237.216637,N,12018.063981,E,0.0,84.8,150917,,A*5A

• Ethernet0/Ethernet1: Ethernet information

- Mode: Only support static IP.
- MAC Address: Unique identifier assigned to the network interface.
- IP Address: Computer address under Internet protocol.
- Mask: The mask will be provided by the gateway provider.

• WLAN information (for Wi-Fi module(option) only, unavailable now)

■ Mode: AP / Station / Closed

• Mobile Network information^[1]

■ Status: "connected" means the modem dialed successfully.

■ IP Address: IP address provided by ISP provider.

■ IP Address for VPN: IP address provided by VPN Server.

• Modem information^[2]

■ IMEI: IMEI number of communication module.

■ PIN Code: The status of the PIN code.

◆ READY: PIN code is ready.

◆ SIM PIN: Need PIN code.

◆ SIM PUK: Need PUK code.

◆ SIM failure: Access to SIM card failure.

■ Register Status: Indicates whether the machine is successfully connected to the mobile network.

■ Signal Quality: 4G / 5G signal quality.

※ [1] Display information after 4G/5G connection.

※ [2] Display information after installing the communication module.

• GPS information

■ GPS Status: The status of the GPS.

◆ GPS is ready: Click "Show Map" to show the location of the GRP device

◆ No GPS data: Unable to locate.

■ GPS Data: Display GPS raw data.

5.2.3 Storage Information

The “Storage Information” page provides information about "Micro SD Card".

/dev/mmcblk1p1	
Size	3.7G
used	32K
Available	3.7G
Path (Mount Point)	/media/mmcblk1p1

- Micro SD card
 - Size: Total storage size
 - used: Used size
 - Available: Free space in the storage
 - Path: The mount point in the file system.

5.3 Network

5.3.1 Ethernet

The “Ethernet” page provides basic settings for Ethernet0 (LAN1) and Ethernet1 (LAN2)

Ethernet0	
IP Address	192.168.255.1
Mask	255.255.0.0
Gateway	
Ethernet1	
IP Address	10.0.255.1
Mask	255.255.255.0
Gateway	
Modify	

- (1) IP Address: Ethernet IP.
- (2) Mask: Ethernet mask.
- (3) Gateway: Gateway IP.

5.3.2 WLAN

This includes the Wi-Fi module (option) AP mode and Station mode related settings, this part is not currently supported yet.

5.3.3 PIN / APN Configure

The "PIN / APN Configure" page provides the basic settings of 4G / 5G network:

PIN / APN Configure	
PIN Code	0000
Phone Number	*99***1# (1)
APN	internet (2)
User Name	(2)
Password	(2)
Modify	
(1):usually use *99# or *99***1#	
(2):please ask your SIM Card provider	

- PIN Code: The PIN code is a 4-character number provided by the SIM card provider.
- Phone Number: It is generally filled in as "*99***1#" or "*99#", depending on the SIM card provider.
- APN: Access point name. Please consult the SIM card provider.
- User Name: Dial-up user name. Please consult the SIM card provider.
- Password: Dial-up password. Please consult the SIM card provider.

5.3.4 Network Reconnection

The "Network Reconnect" page provides a function to keep the device on the mobile network at all times, but it will send an ICMP signal to check the mobile network.

Network Reconnection	
Server IP	8.8.8.8
Max. Retry	5
Retry Interval Time	30
Enable Function	☐ Enable
Modify	
(1):This function will run immediately after you press "Modify" button (2):GSM module will be reset after Max. retry (3):System will reboot after GSM module reset 100 times	

- Server IP: The destination IP or URL of the ICMP signal.
- Max. Retry: If the number of system retries exceeds this number, the 4G / 5G module will be reset and dialed again.
- Interval Time: System retry interval.
- Enable Function: Whether to enable this function. This setting will run immediately.

5.3.5 DNS

The "DNS" page provides the settings of the DNS server IP.

DNS Server	
Primary DNS Server	168.95.1.1
Alternate DNS Server	8.8.8.8
Modify	

- Primary DNS Server: The device will first use it to obtain DNS service.
- Alternate DNS Server: If the "primary DNS server" is invalid, the device will use it to obtain DNS service

5.3.6 DDNS Client

The "DDNS Client" page provides a real-time update of the dynamic domain name server to point to the changing IP address on the Internet

DDNS Configure	
Server	default@no-ip.com ▼
Domain Name	yourDomain.no-ip.org
Username	yourUserName
Password	yourPassword
Period	0 seconds, 0 to disable function
Modify	

- Server: The domain name of the DDNS service provider.
- Domain Name: The domain name registered by the user.
- Username: The username of DDNS service.
- Password: The password of DDNS service.
- Period: The time period (in seconds) to update the address; fill in 0 to disable this function.

5.3.7 VPN

The "VPN" page provides the function of creating a VPN connection (in PPTP protocol).

VPN Configure	
VPN Server	vpnServerIP
VPN Username	yourUserName
VPN Password	yourPassword
DDNS	Enable
DDNS Server	dynupdate.no-ip.com
DDNS Domain Name	yourDomain.no-ip.org
DDNS Username	yourUserName
DDNS Password	yourPassword
DDNS Period	60
FTP	Enable
FTP Server	ftpServerIP
FTP Port	ftpServerPort
FTP Username	yourUserName
FTP Password	yourPassword
FTP File Name	vpn_ip.txt
FTP Period	60
FTP Passive Mode	☐ Enable
VPN Enable	☐ Enable
Modify	
(1):The VPN of GRP uses PPTP protocol. (2):The DDNS and FTP in this page is used to let user get the VPN IP.	

• VPN:

- VPN Server: The IP of the VPN service provider
- VPN Username: The username of the VPN service.
- VPN Password: The username of the VPN service.

• DDNS:

- DDNS Server: The IP of the DDNS service provider.
- DDNS Domain Name: The domain name registered by the user.
- DDNS Username: The username of the DDNS service.
- DDNS Password: The password of the DDNS service.

- DDNS Period: The time period (in seconds) to update the address.
- FTP:
 - FTP Server: The IP of the FTP service provider.
 - FTP Port: The port of the FTP service provider.
 - FTP Username: The username of the FTP service.
 - FTP Password: The password of the FTP service.
 - FTP File Name: The file used to save the user's address on the server.
 - FTP Period: The time period (in seconds) to update the address.
 - FTP Passive Mode: Whether to enable passive mode.
- VPN Enable: Whether to Enable this function. This setting will run after reboot.

5.3.8 DHCP Server

The "DHCP Server" page provides the settings of Ethernet 0 (LAN1) and Ethernet 1 (LAN2) for the DHCP server.

DHCP Server	
Ethernet0 Subnet	192.168.255.0
Ethernet0 Netmask	255.255.255.0
Ethernet0 Router	192.168.255.1
Ethernet0 Range	192.168.255.100 ~ 192.168.255.125
Ethernet1 Subnet	10.0.255.0
Ethernet1 Netmask	255.255.255.0
Ethernet1 Router	10.0.255.1
Ethernet1 Range	10.0.255.100 ~ 10.0.255.125
Enable	☐ Enable
Modify	

- Subnet: Subnet are a logical partition of an IP network into multiple, smaller network segments. Users can specify the required subnet by themselves
- Netmask: Mask is a 32 bits address used to distinguish between a network address and a host address in IP address.
- Router: IP address of this device.

- Range: Users can specify the desired network IP range by this setting.
- Enable: Enable DHCP Server function

5.3.9 Routing & Port Mapping & White list

The “Routing Rule” page provides setting of routing rules.

ROUTING Rule			
Rule NO.	IP	Mask	Target
0	10.0.255.1	24 ▼	eth0 ▼
1		▼	▼
2		▼	▼
3		▼	▼
4		▼	▼
5		▼	▼
6		▼	▼
7		▼	▼
8		▼	▼
9		▼	▼

· Routing Rule

- IP: IP address.
- Mask: The mask will affect the number of IPs managed by this rule.
 - ◆ “24” means “255” IP.
 - ◆ “28” means “16” IP.
 - ◆ “32” means “1” IP.
- Target: The target interface of the rule.
 - ◆ “eth0” is “Ethernet0 (LAN1)”
 - ◆ “eth1” is “Ethernet1 (LAN2)”
 - ◆ “wwan0” is “4G network”
 - ◆ “rmnet_usb0.1” is “5G network”

※ For example:

Rule 0 will push socket data packets with addresses from 10.0.255.1 to 10.0.255.255 to "eth0" (Ethernet0 (LAN1)).

The "Routing Mapping Rule" page provides setting of port forwarding.

Port Mapping Rule					
Rule NO.	Type	From	Port	Target IP	Target Port
0	TCP ▾	eth0 ▾	10080	10.0.255.100	80
1	▾	▾			
2	▾	▾			
3	▾	▾			
4	▾	▾			
5	▾	▾			
6	▾	▾			
7	▾	▾			
8	▾	▾			
9	▾	▾			
Modify					

• Port Mapping Rule

- Type: Protocol type supports "TCP" and "UDP"
- From: The interface from which the socket comes.
- Port: The port from which the socket comes.
- Target IP: The forward IP of the socket.
- Target Port: The forward port of the socket.

※ For Example:

Rule 0 will bind sockets from "eth0" and port "10080" to "10.0.255.100:80".

The "Whitelist" page provides setting of white list.

Whitelist		
Rule NO.	From	IP
0	eth0 ▼	192.168.255.100
1	▼	
2	▼	
3	▼	
4	▼	
5	▼	
6	▼	
7	▼	
8	▼	
9	▼	
Modify		

• Whitelist Rule

- From: Connection interface.
- IP: IP addresses allowed to connect

※ For Example:

Only device at 192.168.255.100 of eth0 are allowed to connect.

※Warning:

Please set it carefully, devices not in the list will not be able to connect

5.3.10 Diagnostic

The “Diagnostic” page provides tools for checking network issues.

Ping Test	
Target IP	8.8.8.8
Result	
ping	

Traceroute	
Target IP	8.8.8.8
Result	
traceroute	
This function will take time more than 2 minute.	

Route Information	
Result	
route	

- Ping Test: This tool will ping the "Target IP" and display the result below.
- Traceroute: This tool will trace the routing path to the "Target IP" and display the results below.
- Route Information: This tool will show route settings below.

5.3.11 Reset Network

The "Reset Network" page provides the function of resetting all Ethernet, DHCP, routing rules and port forwarding settings.

Notice!!	
Are you sure to reset network? It will reset your Ethernet, WLAN, DHCP Server, and ROUTING Rule configure. Please wait a minute for system rebooting after you press reset button.	
Reset	
(1):The default Ethernet IP is 192.168.255.1 (2):The default WLAN IP is 10.10.0.1	

5.4 System

5.4.1 Password

The "Change Password" page provides password settings.

Change Password	
New Password	
Confirm	
Modify	
The length of password must be more then 4 characters that limited in a~z, A~Z, 0~9.	

- Password: Enter the new password.
- Confirm: Confirm the new password.

5.4.2 Reboot

The "Reboot" page provides the function of restarting the device.

Notice!!
Are you sure to reboot? please wait a minute for system rebooting after you press reboot button.
Reboot

5.4.3 Reboot Timer

The "Restart Timer" page provides the function of automatically restarting the system.

Reboot Timer (Reboot system automatically)	
Reboot Time (everyday)	0 : 0 (hour:minute)
Enable Function	☐ Enable
Modify	
(1): This function will run immediately after you press "Modify" button	

- Reboot Time (everyday): Time to reboot the system.
- Enable: Whether to Enable this function. This setting will run immediately.

5.4.4 Backup & Restore

The "Backup and Restore" page provides backup and restore of settings.

Backup & Restore	
Backup	Backup
Restore	瀏覽... Restore

- Backup: Press the "Backup" button to back up the settings to the user's PC.
- Restore: Press the "Browse" button to select the file, and then press the "Restore" button to store your settings.

5.4.5 Update

The "Update" page provides a firmware update function. Users can download the update file (".tar") from the IPCDAS website, and then put it into the SD card. Please back up the configuration before updating and restore it after the update.

Update
Are you sure to update? It may reset some configure file.
Update
(1):Must put "updateFile.tar.gz" file in SD card. (2):Need to wait several minutes for update. (3):It will reboot after update.

5.4.6 Restore Factory

The "Restore Factory" page provides the function to restore the settings to the factory settings.

Restore Factory Setting
The device will reboot after restoring factory settings.
Restore

5.4.7 Time

The "Time" page provides the time information of the device.

Time Configure	
Device Time (24-hour)	2015 / 11 / 06 10 : 23 : 38 Set Time
NTP Server (Time Server)	tock.stdtime.gov.tw Ex: tock.stdtime.gov.tw
Timezone	+8 check timezone
Enable NTP Function	☒ Enable
Modify	

- Set Time: Set the device's time to be the same as your computer.
- NTP Server: The device will connect to the NTP server to synchronize the time.
- Timezone: If the user does not know your time zone, please click the "Check Time Zone" link to find it.

- Enable NTP Function: If this function is enabled, the device will automatically update the time.

5.5 VxServer

Through "VxServer" and "VxComm Utility", users can create a virtual COM port on a remote PC to communicate with the COM port of the device.

5.5.1 VxServer

The "VxServer" page provides the function of establishing a connection with the VxServer.

Virtual COM Function (VxServer)	
Server IP	192.168.12.2
Server Port	11000 default=11000
Heartbeat Time	10 10~65535 seconds
Device ID	1 1~255, unique ID for device
Alias	GRP-2841M Max. Length = 8
Time Interval	50 1~5000 ms, default=50
Data Length	1000 10~1000 bytes, default=1000
Modbus TCP to RTU (Port1)	☐ Enable, COM1 --> TCP Port 10001
Modbus TCP to RTU (Port2)	☐ Enable, COM2 --> TCP Port 10002
Modbus TCP to RTU (Port3)	☐ Enable, COM3 --> TCP Port 10003
Default Baudrate (Port1)	115200 ▼ bps
Default Baudrate (Port2)	115200 ▼ bps
Default Baudrate (Port3)	115200 ▼ bps
Default Format (Port1)	8N1 ▼ (Data bit, Parity, Stop bit)
Default Format (Port2)	8N1 ▼ (Data bit, Parity, Stop bit)
Default Format (Port3)	8N1 ▼ (Data bit, Parity, Stop bit)
Enable Function	☐ Enable
Firmware Version	v1.0.2
Modify	
(1)Heartbeat Time: if this value is small, it is sensitive to detect network disconnected (2)Virtual IP: please set it different from other virtual COM device	

- Server IP: VxServer IP or domain name.
- Server Port: VxServer port number.
- Heartbeat Time: The time interval for sending heartbeat packets to VxServer.^[1]
- Device ID: The unique ID used to identify the device.
- Alias: The alias of the device. The maximum length is 8 characters.
- Time Interval: The time interval for sending serial port data to VxServer.^[2]
- Data Length: The data length of the serial port data sent to the VxServer.^[3]
- Modbus TCP to RTU: Modbus TCP to Modbus RTU gateway function.
 - “Port1” = “COM1 (RS-232)”
 - “Port2” = “COM2 (RS-485)”
 - “Port3” = “COM3 (RS-485)”
- Default Baudrate: This value depends on your serial device.
 - “115200” means baud rate is 115200 bps
 - “57600” means baud rate is 57600 bps
 - “38400” means baud rate is 38400 bps
 - “19200” means baud rate is 19200 bps
 - “9600” means baud rate is 9600 bps
- Default Format: The configuration of "data bit", "parity" and "stop bit".
 - Data bit support
 - ◆ “8” means “8-bits”
 - ◆ “7” means “7-bits”
 - Parity bit support
 - ◆ “N” means “None”
 - ◆ “O” means “Odd”
 - ◆ “E” means “Even”
 - Stop bit support
 - ◆ “2” means “2-bits”
 - ◆ “1” means “1-bit”
- Enable Function: Whether to Enable this function. This setting will run after reboot.

※ [1] VxServer will detect the disconnection in advance and terminate the connection.

※ [2] If the time interval between two serial data is greater than this value, the data will be divided into two network packets. If there is not enough time interval, but the data length exceeds the “Data Length”, the data is still divided into two network packets.

※[3] If the serial port data length exceeds this value, the data will be divided into two data packets. If this function is not needed, users usually only need to set this value to 1000 bytes (default). This value is restricted by the network protocol.

5.6 RTU Client

The RTU device uploads its I/O information, Modbus RTU/TCP device I/O information and GPS information to the RTU Center.

5.6.1 RTU Client

The "RTU Client" page provides the function of establishing a connection with RTU Center and the setting of Modbus communication

Main Info. tab

Main Info.	Modbus Device	FTP / Email
Server Address	192.168.12.2	
Server Port	10000	default=10000
Station ID	1	1~65535
Data Update Period(sec.)	3	0~86400 (0=disable)
Heartbeat Period(sec.)	0	1~86400 (a day)
Baud Rate (for Modbus/RTU)	9600 ▼ bps	
Data Bit	8 ▼	
Parity	N ▼	
Stop Bit	1 ▼	
Modbus Timeout (ms)	1000	50~99999, default=1000
Enable Firmware	☐ Enable	
Firmware Version	V1.1.1 2016/10/07	
Modify		

- Server Address: RTU Center IP or domain name.
- Server Port: RTU Center port number.
- Station ID: The unique ID used to identify the device.

- Data Update Period (sec.): The time interval for sending data packet.
- Heartbeat Period (sec.): The time interval for sending heartbeat packet.^[1]
- Baud Rate (for Modbus/RTU): The baud rate of UART (COM1~3).
- Data bit: The data bit of UART (COM1~3).
- Parity: The parity bit of UART (COM1~3).
- Stop bit: The stop bit of UART (COM1~3).
- Modbus Timeout (ms): Modbus communication timeout value.
- Enable Firmware: Enable this feature.

※ [1] The RTU center will detect the disconnection in advance and terminate the connection. The "Heartbeat Period" must be less than "Data Update Period".

Modbus Number tab

Main Info.		Modbus Device		FTP / Email	
Modbus Device Number : 0			Add ET-7050 ▼		
1	Name :		Edit Delete		
Device Name	1_ET-7050	Max Length=20			
Device ID	1	1~255			
IP	192.168.1.1	IP/COM1/COM2/COM3 COM is for Modbus/RTU, empty is for COM2			
Port	502	Default=502, 1~65535			
DI Number	12	0~32			
DO Number	6	0~32			
AI Number	0	0~16			
AO Number	0	0~16			
DI Address	0	0~65535			
DO Address	0	0~65535			
AI Address	0	0~65535			
AO Address	0	0~65535			
Modify Cancel					

- Modbus Device Number: The Modbus device number is displayed here.
Users can select a model in the list, and then click "Add" to

add a new Modbus device.

- Device Name: The name of the Modbus device is displayed in the RTU Center.
- Device ID: Modbus ID.
- IP: The IP of Modbus TCP device.^[1]
- Port: The Port of Modbus TCP device.
- DI Number: The number of DI channel.
- DO Number: The number of DO channel.
- AI Number: The number of AI channel.
- AO Number: The number of AO channel.
- DI Address: The start address for reading DI value.
- DO Address: The start address for reading DO value.
- AI Address: The start address for reading AI value.
- AO Address: The start address for reading AO value.

※ [1] For Modbus RTU device, fill in COM number, ex: COM1 / COM2 / COM3. If blank, the default is COM2.

FTP / Email tab

Main Info.	Modbus Device	FTP / Email
Data Log Interval (sec.)	5	0~86400 (0=disable)
Max. Time per Log File (min.)	60	3~1440 minutes
FTP Server Address	192.168.12.2	empty --> disable FTP
FTP Port	21	default=21
FTP Username	test	
FTP Password	test	
Enable FTP Function	☐ Enable	
Email From	abc@gmail.com	empty --> disable Email Ex: abc@gmail.com
Email To	xyz@gmail.com	Ex: xyz@gmail.com
Example for 2 or more contact	xx@gmail.com,yy@gmail.com	
Email Server	smtp.gmail.com	Ex: smtp.gmail.com
Email Server Port	25	Ex: 25
Email Username	abc	Ex: abc
Email Password	123abc	Ex: 123abc
Enable Email Function	☐ Enable	
Modify		

- Data Log Interval (sec.): The time interval for recording I / O data.^[1]
- Max. Time per Log File (min.): The time interval for splitting new log files.^[2]
- FTP Server Address: FTP Server IP or Domain name.
- FTP Port: FTP server port number.
- FTP Username: The username of FTP account.
- FTP password: The password of FTP account.
- Enable FTP Function: Enable FTP report function.
- Email From: The email will be sent from this address.
- Email To: The email will be sent to this address.^[3]
- Email Server: The server address of the email server.
- Email Server Port: The server port of the email server.^[4]
- Email Username: The username of email account.
- Email Password: The password of email account.
- Enable Email Function: Enable email report function.

- ※ [1] Setting to "0" will disable all functions in this tab.
- ※ [2] The interval at which log files are sent via email or FTP. When the log file exceeds 3 MB or the new file split interval exceeds this value, the log file will be treated as an old log file and moved to the "LOGFILE" folder.
If users enable the "Enable FTP Function" / "Enable Email Function", these old log files will be copied to "FTP_UPLOAD" / "MAIL_UPLOAD" and sent.
- ※ [3] Use "," to separate each email address
- ※ [4] Usually 25, 465, or 587.

5.6.2 FTP Test

The "FTP Configuration Test" page provides a tool to send test files to the FTP server.

FTP Configure Test		
FTP Server Address	192.168.12.2	empty --> disable FTP
FTP Port	21	default=21
FTP Username	test	
FTP Password	test	
Result		
Test		

- FTP Server Address: FTP Server IP or Domain Name.
- FTP Port: FTP server port number.
- FTP Username: The username of FTP account.
- FTP password: The password of FTP account.

5.6.3 Email Test

The "Email Test" page provides tools for sending test emails.

Email Configure Test		
Email From	abc@gmail.com	Ex: abc@gmail.com
Email To	xyz@gmail.com	Ex: xyz@gmail.com
Email Server	smtp.gmail.com	Ex: smtp.gmail.com
Email Server Port	25	Ex: 25 or 587
Email Username	abc	Ex: abc
Email Password	123abc	Ex: 123abc
Result		
Test		

- Email From: The email will be sent from this address.
- Email To: The email will be sent to this address.^[1]
- Email Server: The email server IP.
- Email Server Port: The email server port number.^[2]
- Email Username: The username of email account.
- Email Password: The password of email account.
- “Test” button: Press this button to send test emails.

※ [1] Using “,” to separate each mail address.

※ [2] Usually 25, 465, or 587.

5.6.4 Modbus Test

The “Modbus Configure Test” page provides tools for polling Modbus devices.

The following is an example of ET-7026.

Modbus Configure Test	
Result	<pre> modbus debug start DEBUG [2014-08-15 17:20:57] [1] DI value= (0, 0) DEBUG [2014-08-15 17:20:57] [1] DO value= (0, 1) DEBUG [2014-08-15 17:20:57] [1] AI value= (65535, 65535, 65535, 65535, 65535, 65535) DEBUG [2014-08-15 17:20:57] [1] AO value= (0, 273) </pre>
Test	
MODBUS Exception Codes: 01: ILLEGAL FUNCTION 02: ILLEGAL DATA ADDRESS 03: ILLEGAL DATA VALUE 04: SLAVE DEVICE FAILURE 05: ACKNOWLEDGE 06: SLAVE DEVICE BUSY 08: MEMORY PARITY ERROR 0A: GATEWAY PATH UNAVAILABLE 0B: GATEWAY TARGET DEVICE FAILED TO RESPOND	

6. Example

6.1 5G Router Application

This example shows the steps to share 5G network to 3 XPAC8000.



(1) The Ethernet configuration of XPAC8000 is as follows:

- IP is from "192.168.0.10" to "192.168.0.12".
- Mask is "255.255.0.0".
- Gateway is "192.168.27.31".

(2) Fill in the Ethernet IP and mask. After finishing all the settings, click "Modify".

Ethernet	
IP Address	192.168.27.31
Mask	255.255.0.0
Gateway	
Modify	

(3) If necessary, fill in "PIN Code", "APN", "User Name" and "Password". After finishing all the settings, click "Modify".

PIN / APN Configure	
PIN Code	0000
Phone Number	*99***1# (1)
APN	internet (2)
User Name	(2)
Password	(2)
Modify	
(1):usually use *99# or *99***1# (2):please ask your SIM Card provider	

- (4) Enable the "Network Reconnect" function to ensure that the mobile network is always online (usually, the ISP will disconnect once every 1 to 3 days).
 Server IP can fill in user server IP or Google DNS server IP (8.8.8.8).
 If the user uses MDVPN, please make sure that the server IP does not deny the ICMP service (Ping). After finishing all the settings, click "Modify".

Network Reconnection	
Server IP	8.8.8.8
Max. Retry	5
Retry Interval Time	30
Enable Funcion	☒ Enable
Modify	
(1):This function will run immediately after you press "Modify" button (2):GSM module will be reset after Max. retry (3):System will reboot after GSM module reset 100 times	

- (5) Fill in the routing rules to share the 4G/5G network. Rule 0 will share the 4G/5G network to IP addresses from 192.168.0.1 to 192.168.0.255. After finishing all the settings, click "Modify".

ROUTING Rule			
Rule NO.	IP	Mask	Target
0	192.168.0.1	24 ▼	wwan0 ▼
1		▼	▼
2		▼	▼
3		▼	▼
4		▼	▼
5		▼	▼
6		▼	▼
7		▼	▼
8		▼	▼
9		▼	▼

- (6) Please reboot the device to enable the setting.

Information
[--Device Info](#)
[--Network Info](#)
[--Storage Info](#)

Network
[--Ethernet](#)
[--2G/3G](#)
[--DNS](#)
[--DDNS](#)
[--DHCP Server](#)
[--Routing](#)
[--Port Mapping](#)
[--Diagnostic](#)

Process
[--System](#)
[--User](#)

System
[--Password](#)
[--Reboot](#)
[--Backup/Restore](#)

Notice!!

Are you sure to reboot? please wait a minute for system rebooting after you press reboot button.

Reboot

6.2 Web Server and IP Camera Application

This example shows the steps to share 3G/4G network to ET-7044 and IP camera.



(1) The Ethernet configuration of ET-7044 is as follows:

- IP is from "192.168.0.20" to "192.168.0.22".
- Mask is "255.255.0.0".
- Gateway is "192.168.27.31".

(2) Fill in the Ethernet IP and mask. After finishing all the settings, click "Modify".

Ethernet	
IP Address	192.168.27.31
Mask	255.255.0.0
Gateway	
Modify	

- (3) If necessary, fill in "PIN Code", "APN", "User Name" and "Password". After finishing all the settings, click "Modify".

PIN / APN Configure	
PIN Code	0000
Phone Number	*99***1# (1)
APN	internet (2)
User Name	(2)
Password	(2)
Modify	
(1):usually use *99# or *99***1# (2):please ask your SIM Card provider	

- (4) Enable the "Network Reconnect" function to ensure that the mobile network is always online (usually, the ISP will disconnect once every 1 to 3 days).
Server IP can fill in user server IP or Google DNS server IP (8.8.8.8).
If the user uses MDVPN, please make sure that the server IP does not deny the ICMP service (Ping). After finishing all the settings, click "Modify".

Network Reconnection	
Server IP	8.8.8.8
Max. Retry	5
Retry Interval Time	30
Enable Funcion	☒ Enable
Modify	
(1):This function will run immediately after you press "Modify" button (2):GSM module will be reset after Max. retry (3):System will reboot after GSM module reset 100 times	

(5) Fill in the routing rules to enable users to access the devices behind the GRP device through the Internet. Rules 0 to 2 bind the ports of the 4G/5G network interface to the "Target IP" and "Target port". After finishing all the settings, click "Modify".

- Bind port 12080 of 4G / 5G network interface to "192.168.0.20:80".
- Bind port 12180 of 4G / 5G network interface to "192.168.0.21:80".
- Bind port 12280 of 4G / 5G network interface to "192.168.0.22:80".

Port Mapping Rule					
Rule NO.	Type	From	Port	Target IP	Target Port
0	TCP ▾	wwan0 ▾	12080	192.168.0.20	80
1	TCP ▾	wwan0 ▾	12180	192.168.0.21	80
2	TCP ▾	wwan0 ▾	12280	192.168.0.22	80
3	▾	▾			
4	▾	▾			
5	▾	▾			
6	▾	▾			
7	▾	▾			
8	▾	▾			
9	▾	▾			

[Modify](#)

(6) Please reboot the device to enable the setting.

Information

--[Device Info](#)

--[Network Info](#)

--[Storage Info](#)

Network

--[Ethernet](#)

--[2G/3G](#)

--[DNS](#)

--[DDNS](#)

--[DHCP Server](#)

--[Routing](#)

--[Port Mapping](#)

--[Diagnostic](#)

Process

--[System](#)

--[User](#)

System

--[Password](#)

--[Reboot](#)

--[Backup/Restore](#)

Notice!!

Are you sure to reboot? please wait a minute for system rebooting after you press reboot button.

[Reboot](#)



- (7) To view the IP camera image from a web browser, please enter the IP address or domain name of the GRP device in the 4G / 5G network.

ICP DAS
http://www.icpdas.com

Welcome to the ET-7000 Web configuration page

Model Name	ET-7044
MAC Address	00:0d:e0:64:44:8c
Module Information	
Firmware Version	1.3.0 (Mar 26 2012)
IO Version	1.09
OS Version	2.2.10 (Jun 4 2009)
DI channels	8
DO channels	8
AI channels	0
AO channels	0

6.3 Remote I/O Control / Temperature Monitor

This example shows the remote control application through "Serial port to 5G gateway function".



(1) Connect the device (DL-100 or PLC) to the serial port of the GRP device.

(2) Open VxServer. For more information about VxServer, please refer to:

<https://www.icpdas.com/tw/download/index.php?nation=TW&kind1=&model=&kw=vxserver>

※ VxServer supports up to 128 GRP devices.

- (3) If necessary, fill in "PIN Code", "APN", "User Name" and "Password". After finishing all the settings, click "Modify".

PIN / APN Configure	
PIN Code	0000
Phone Number	*99***1# (1)
APN	internet (2)
User Name	(2)
Password	(2)
Modify	
(1):usually use *99# or *99***1# (2):please ask your SIM Card provider	

- (4) Enable the "Network Reconnect" function to ensure that the mobile network is always online (usually, the ISP will disconnect once every 1 to 3 days).
Server IP can fill in user server IP or Google DNS server IP (8.8.8.8).
If the user uses MDVPN, please make sure that the server IP does not deny the ICMP service (Ping). After finishing all the settings, press the "Modify" button.


Network Reconnection	
Server IP	8.8.8.8
Max. Retry	5
Retry Interval Time	30
Enable Function	☒ Enable
Modify	
(1):This function will run immediately after you press "Modify" button (2):GSM module will be reset after Max. retry (3):System will reboot after GSM module reset 100 times	

(5) Fill in the "Server IP" and "Server Port" (default 11000).

After finishing all the settings, check the "Enable" field, and then press the "Modify" button.

Virtual COM Function (VxServer)	
Server IP	192.168.12.2
Server Port	11000 default=11000
Heartbeat Time	10 10~65535 seconds
Device ID	1 1~255, unique ID for device
Alias	GRP-2841M Max. Length = 8
Time Interval	50 1~5000 ms, default=50
Data Length	1000 10~1000 bytes, default=1000
Modbus TCP to RTU (Port1)	☐ Enable, COM1 --> TCP Port 10001
Modbus TCP to RTU (Port2)	☐ Enable, COM2 --> TCP Port 10002
Modbus TCP to RTU (Port3)	☐ Enable, COM3 --> TCP Port 10003
Default Baudrate (Port1)	115200 ▼ bps
Default Baudrate (Port2)	115200 ▼ bps
Default Baudrate (Port3)	115200 ▼ bps
Default Format (Port1)	8N1 ▼ (Data bit, Parity, Stop bit)
Default Format (Port2)	8N1 ▼ (Data bit, Parity, Stop bit)
Default Format (Port3)	8N1 ▼ (Data bit, Parity, Stop bit)
Enable Function	☒ Enable
Firmware Version	v1.0.2
Modify	
(1)Heartbeat Time: if this value is small, it is sensitive to detect network disconnected (2)Virtual IP: please set it different from other virtual COM device	

(6) Please reboot the device to enable the setting.

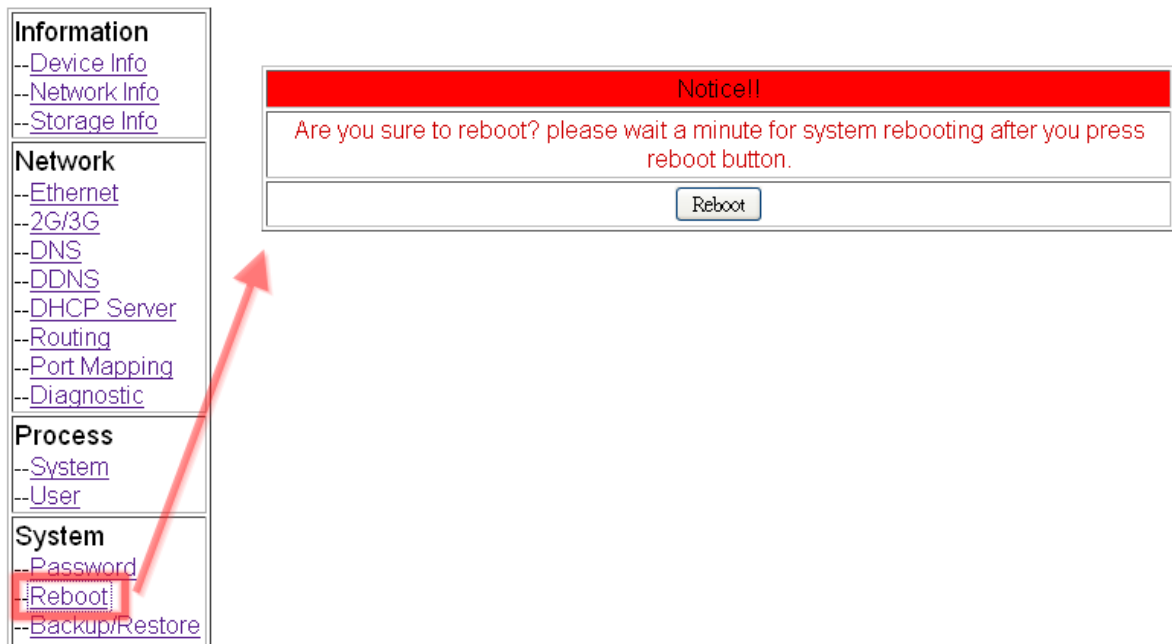

(7) After rebooting, the GRP device will automatically connect to VxServer.

The screenshot shows the VxServer application window with the title 'VxServer Ver1.02 2014/07/21'. It has a menu bar with 'Settings', 'Help', and 'Exit'. Below the menu is a table with the following data:

Virtual IP	Module	Alias	Com Number	Heartbeat	Remote Client IP	Remote Client
127.53.0.1	GRP-2841	GRP-2841	3	10	127.53.0.1	8387

※ The "Virtual IP" with subnet "127.53.0.0/24" is determined by the "Device ID" of the GRP device. The range is from "127.53.0.1 ~ 127.53.0.255".

(8) After the GRP device is connected to VxServer, follow the steps below.

A. Open VxComm Utility. For more information about VxComm, please refer to:

<https://www.icpdas.com/tw/download/index.php?nation=TW&kind1=&model=&kw=vxcomm>

※ VxComm Utility version must be greater than v2.14.03.

※ VxComm Utility creates 3 virtual COM ports for each GRP device.

B. Press the "Search Servers" button to get the device list.



C. Right-click on "GRP-2841"


D. Click "Add Server".

E. Select the starting number of the virtual serial port.


F. Change the settings tab to "Server Options" and set it as screenshot.

G. Click "OK".

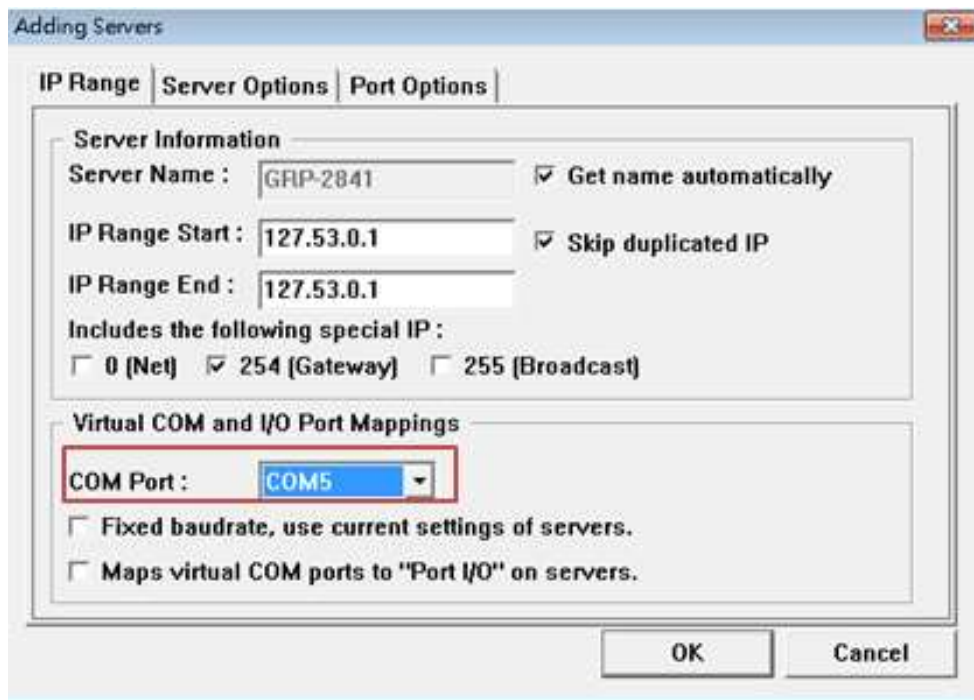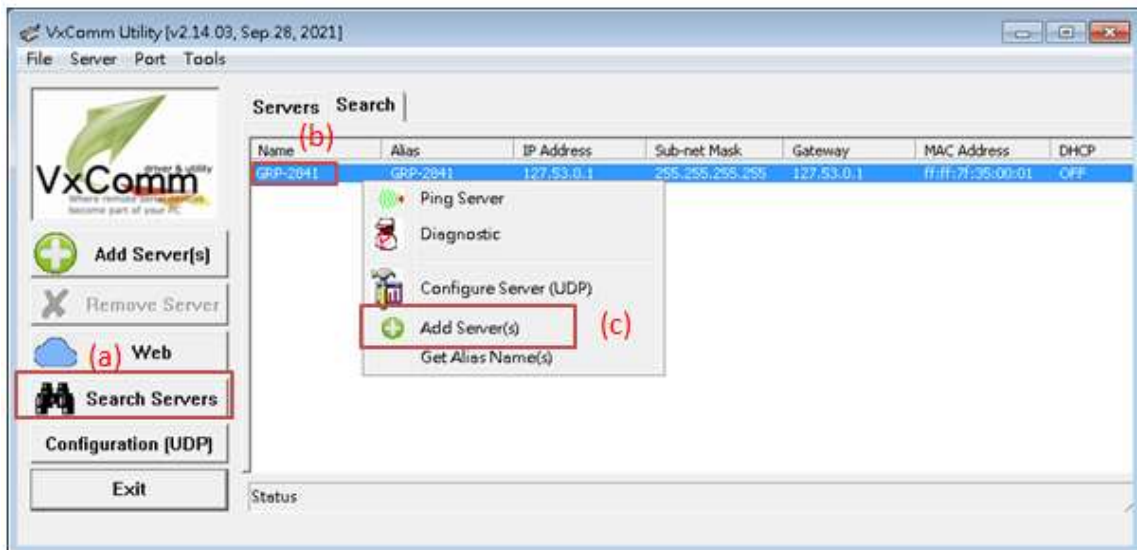

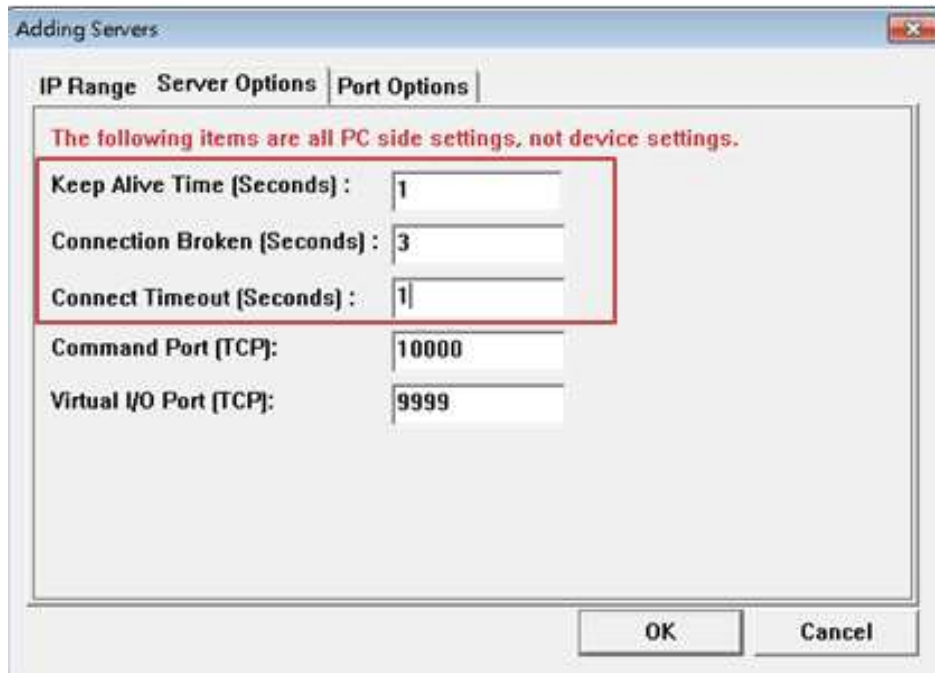

- (9) The user will see the virtual COM ports (COM5 and COM7 in this example). If the user cannot open them, please follow the below steps to open the virtual COM port.
- Click "Tools / Restart Driver" to restart the driver.
 - Open the com port to connect your device.

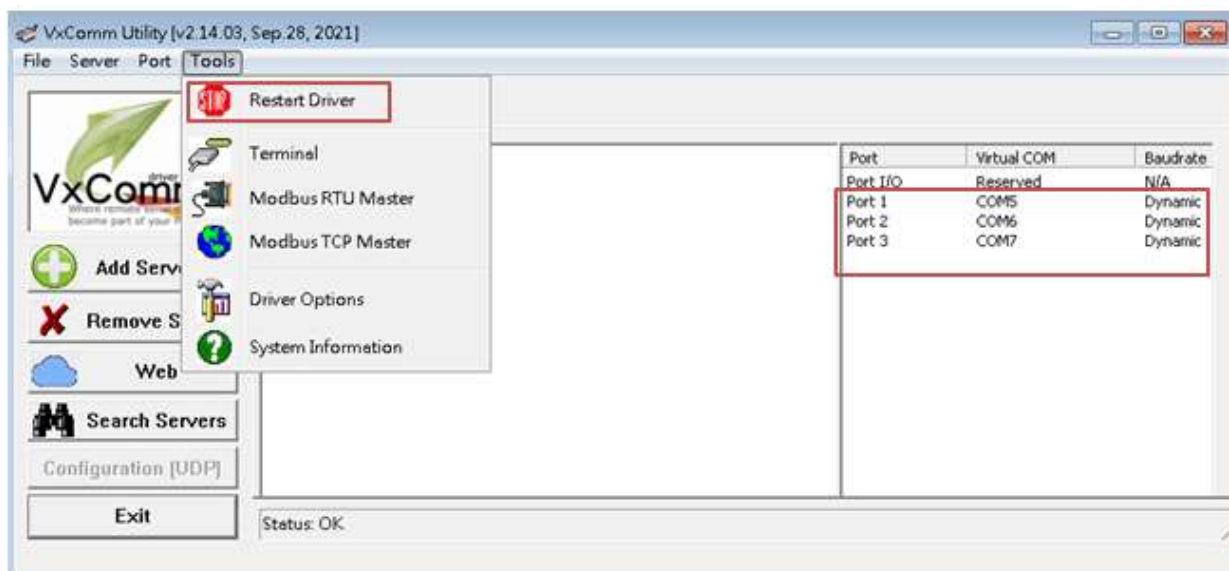

6.4 Modbus TCP to Modbus RTU over 5G

After completing the following steps, please set the "IP:Port" of the Modbus TCP program to "127.53.0.1:10001" in your control center (TCP port 10001 for COM1/RS-232; TCP port 10002 for COM2/RS-485; TCP port 10003 for COM3/RS-485).



(1) Please connect your device (M-7017 or PLC) to RS-485 of GRP device. The baudrate of Modbus device is 9600 bps and the data format is 8N1.

(2) Open VxServer. For more information about VxServer, please refer to:

<https://www.icpdas.com/tw/download/index.php?nation=TW&kind1=&model=&kw=vxserver>

※ VxServer software supports up to 128 GRP devices.

※ VxServer software creates 3 TCP server with virtual IP for each GRP device.

- (3) If necessary, fill in "PIN Code", "APN", "User Name" and "Password". After finishing all the settings, click "Modify".

PIN / APN Configure	
PIN Code	0000
Phone Number	*99***1# (1)
APN	internet (2)
User Name	(2)
Password	(2)
Modify	
(1):usually use *99# or *99***1# (2):please ask your SIM Card provider	

- (4) Enable the "Network Reconnect" function to ensure that the mobile network is always online (usually, the ISP will disconnect once every 1 to 3 days).
Server IP can fill in user server IP or Google DNS server IP (8.8.8.8).
If the user uses MDVPN, please make sure that the server IP does not deny the ICMP service (Ping). After finishing all the settings, click "Modify".

Network Reconnection	
Server IP	8.8.8.8
Max. Retry	5
Retry Interval Time	30
Enable Funcion	☒ Enable
Modify	
(1):This function will run immediately after you press "Modify" button (2):GSM module will be reset after Max. retry (3):System will reboot after GSM module reset 100 times	


(5) Fill in the "Server IP" and "Server Port" (default 11000).

For Modbus RTU devices, set Port2 (RS-485) as follows.

After finishing all the settings, check "Enable Function", and then click "Modify".

Virtual COM Function (VxServer)		
Server IP	192.168.12.2	
Server Port	11000	default=11000
Heartbeat Time	10	10~65535 seconds
Device ID	1	1~255, unique ID for device
Alias	GRP-2841M	Max. Length = 8
Time Interval	50	1~5000 ms, default=50
Data Length	1000	10~1000 bytes, default=1000
Modbus TCP to RTU (Port1)	☐ Enable, COM1 --> TCP Port 10001	
Modbus TCP to RTU (Port2)	☒ Enable, COM2 --> TCP Port 10002	
Modbus TCP to RTU (Port3)	☐ Enable, COM3 --> TCP Port 10003	
Default Baudrate (Port1)	115200 ▼ bps	
Default Baudrate (Port2)	9600 ▼ bps	
Default Baudrate (Port3)	115200 ▼ bps	
Default Format (Port1)	8N1 ▼ (Data bit, Parity, Stop bit)	
Default Format (Port2)	8N1 ▼ (Data bit, Parity, Stop bit)	
Default Format (Port3)	8N1 ▼ (Data bit, Parity, Stop bit)	
Enable Function	☒ Enable	
Firmware Version	v1.0.2	
Modify		
(1)Heartbeat Time: if this value is small, it is sensitive to detect network disconnected (2)Virtual IP: please set it different from other virtual COM device		

(6) Please reboot the device to enable the setting.

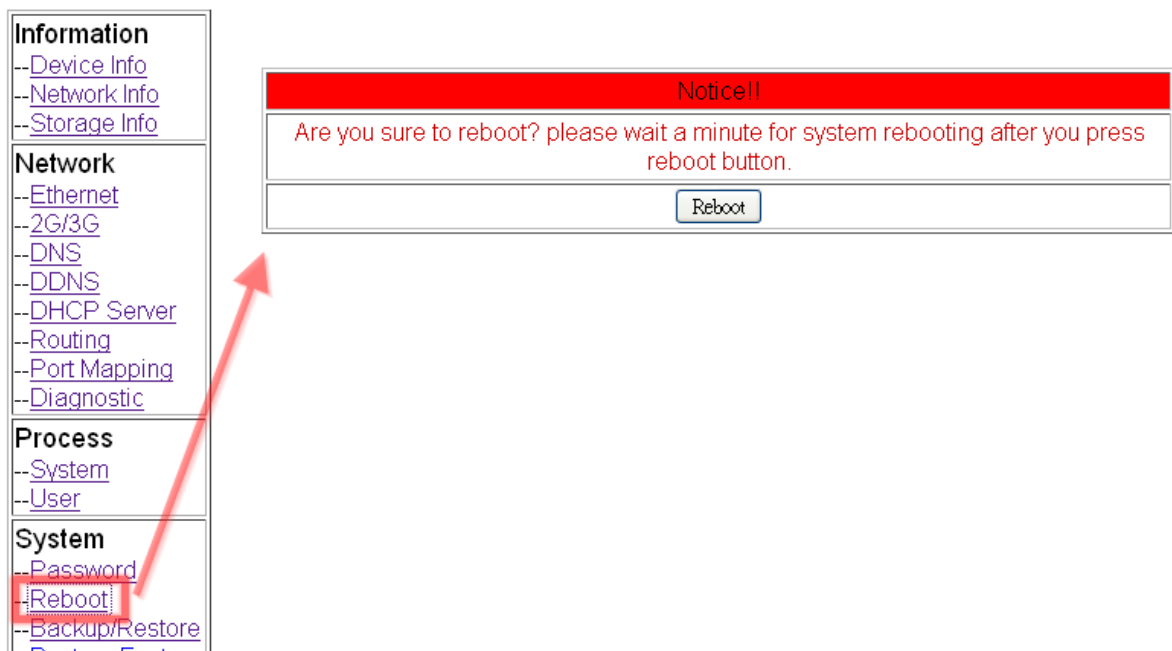

(7) After rebooting, the GRP device will automatically connect to VxServer.

The image shows a screenshot of the VxServer application window. The title bar says 'VxServer Ver1.02 2014/07/21'. The menu bar has 'Settings', 'Help', and 'Exit'. Below the menu bar is a table with the following columns: 'Virtual IP', 'Module', 'Alias', 'Com Number', 'Heartbeat', 'Remote Client IP', and 'Remote Client'. The first row of the table contains the following data: '127.53.0.1', 'GRP-2841', 'GRP-2841', '3', '10', '127.53.0.1', and '8387'.

Virtual IP	Module	Alias	Com Number	Heartbeat	Remote Client IP	Remote Client
127.53.0.1	GRP-2841	GRP-2841	3	10	127.53.0.1	8387

※ The "Virtual IP" with subnet "127.53.0.0/24" is determined by the "Device ID" of the GRP device. The range is from "127.53.0.1 ~ 127.53.0.255".

(8) After the GRP device is connected to VxServer, user can connect to "127.53.0.1:10002" (TCP port 10001 for COM1/RS-232; TCP port 10002 for COM2/RS-485; TCP port 10003 for COM3/RS-485) to send/receive Modbus RTU commands using Modbus TCP program.

6.5 RTU Client for Remote Control Application with RTU

API.

This example shows how to use RTU API to collect and control remote Modbus RTU and Modbus TCP I / O with RTU client/server. This system has ET-7050, M-7022 and PLC.



- (1) Please connect the RS-485 or Ethernet of the device (ET-7k or M-7k module) to GRP-2841M-5GE
- (1) If necessary, fill in "PIN Code", "APN", "User Name" and "Password". After finishing all the settings, click "Modify".

PIN / APN Configure	
PIN Code	0000
Phone Number	*99***1# (1)
APN	internet (2)
User Name	(2)
Password	(2)
Modify	
(1):usually use *99# or *99***1#	
(2):please ask your SIM Card provider	

- (2) Enable the "Network Reconnect" function to ensure that the mobile network is always

online (usually, the ISP will disconnect once every 1 to 3 days).

Server IP can fill in user server IP or Google DNS server IP (8.8.8.8).

If the user uses MDVPN, please make sure that the server IP does not deny the ICMP service (Ping). After finishing all the settings, click "Modify".

Network Reconnection	
Server IP	8.8.8.8
Max. Retry	5
Retry Interval Time	30
Enable Funcion	☒ Enable
Modify	
(1):This function will run immediately after you press "Modify" button (2):GSM module will be reset after Max. retry (3):System will reboot after GSM module reset 100 times	

(3) Select "ET-7050" in the list, and then click "Add", the web will display all I/O number information, as shown below.

Modify the "Device Name", "Device ID", "IP" and "Port" of ET-7050, and then click "Modify".

Main Info.		Modbus Device		FTP / Email	
Modbus Device Number : 0			Add ET-7050 ▼		
1	Name :		Edit Delete		
Device Name	ET-7050	Max Length=20			
Device ID	1	1~255			
IP	192.168.11.25	IP/COM1/COM2/COM3 COM is for Modbus/RTU, empty is for COM2			
Port	502	Default=502, 1~65535			
DI Number	12	0~32			
DO Number	6	0~32			
AI Number	0	0~16			
AO Number	0	0~16			
DI Address	0	0~65535			
DO Address	0	0~65535			
AI Address	0	0~65535			
AO Address	0	0~65535			
Modify Cancel					

(4) Select "M-7022" in the list, and then press the "Add" button, the web will display all I/O number information, as shown below.

Modify the "Device Name" and "Device ID" of M-7022 (keep the default values of "IP" and "Port"), and then click "Modify".


Main Info.		Modbus Device		FTP / Email																																					
Modbus Device Number : 1			Add M-7022 ▼																																						
1	Name : 1_ET-7050		Edit Delete																																						
2	Name :		Edit Delete																																						
<table border="1"> <tr> <td>Device Name</td> <td>2_M-7022</td> <td>Max Length=20</td> </tr> <tr> <td>Device ID</td> <td>1</td> <td>1~255</td> </tr> <tr> <td>IP</td> <td colspan="2">IP/COM1/COM2/COM3 COM is for Modbus/RTU, empty is for COM2</td> </tr> <tr> <td>Port</td> <td>502</td> <td>Default=502, 1~65535</td> </tr> <tr> <td>DI Number</td> <td>0</td> <td>0~32</td> </tr> <tr> <td>DO Number</td> <td>0</td> <td>0~32</td> </tr> <tr> <td>AI Number</td> <td>0</td> <td>0~16</td> </tr> <tr> <td>AO Number</td> <td>2</td> <td>0~16</td> </tr> <tr> <td>DI Address</td> <td>0</td> <td>0~65535</td> </tr> <tr> <td>DO Address</td> <td>0</td> <td>0~65535</td> </tr> <tr> <td>AI Address</td> <td>0</td> <td>0~65535</td> </tr> <tr> <td>AO Address</td> <td>0</td> <td>0~65535</td> </tr> </table>						Device Name	2_M-7022	Max Length=20	Device ID	1	1~255	IP	IP/COM1/COM2/COM3 COM is for Modbus/RTU, empty is for COM2		Port	502	Default=502, 1~65535	DI Number	0	0~32	DO Number	0	0~32	AI Number	0	0~16	AO Number	2	0~16	DI Address	0	0~65535	DO Address	0	0~65535	AI Address	0	0~65535	AO Address	0	0~65535
Device Name	2_M-7022	Max Length=20																																							
Device ID	1	1~255																																							
IP	IP/COM1/COM2/COM3 COM is for Modbus/RTU, empty is for COM2																																								
Port	502	Default=502, 1~65535																																							
DI Number	0	0~32																																							
DO Number	0	0~32																																							
AI Number	0	0~16																																							
AO Number	2	0~16																																							
DI Address	0	0~65535																																							
DO Address	0	0~65535																																							
AI Address	0	0~65535																																							
AO Address	0	0~65535																																							
Modify Cancel																																									

(5) Select "Custom" in the list, and then press the "Add" button, the web will display all I/O number information, as shown below.


Modify the "Device Name", "Device ID", "DI Number", "AI Number" of PLC, and then click "Modify".

Main Info.		Modbus Device		FTP / Email	
Modbus Device Number : 2			Add Custom v		
1	Name : 1_ET-7050		Edit Delete		
2	Name : 2_M-7022		Edit Delete		
3	Name :		Edit Delete		
Device Name		myPLC	Max Length=20		
Device ID		1	1~255		
IP			IP/COM1/COM2/COM3 COM is for Modbus/RTU, empty is for COM2		
Port		502	Default=502, 1~65535		
DI Number		4	0~32		
DO Number		0	0~32		
AI Number		4	0~16		
AO Number		0	0~16		
DI Address		0	0~65535		
DO Address		0	0~65535		
AI Address		0	0~65535		
AO Address		0	0~65535		
Modify Cancel					

- (6) Select the "Modbus Test" function, and then press the "Test" button to test the settings.
If the result is successful, follow the next step.

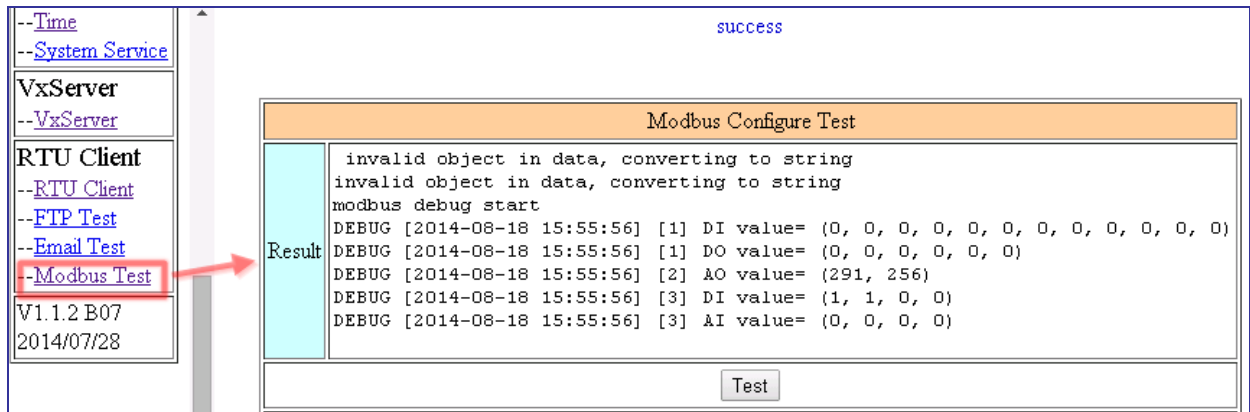

If the result failed, please check your settings or wiring.

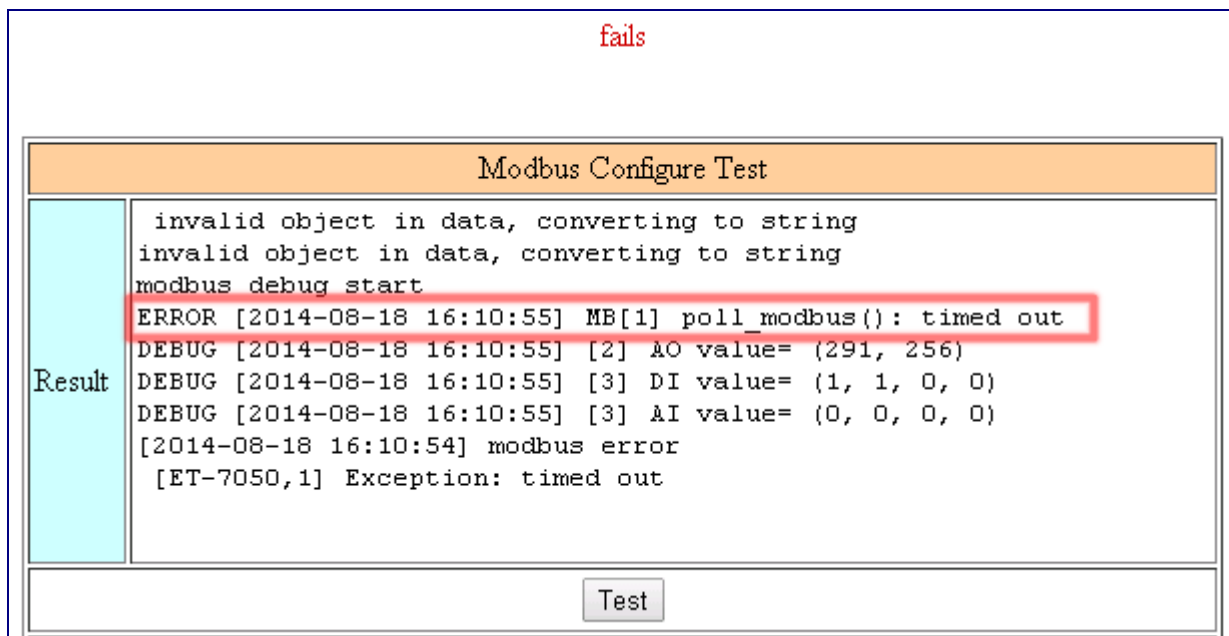


(7) Configure "Main Info." Tab.

- Fill in the "Server Address" and "Server Port" of RTU Center.
- Fill in the "Station ID"(different from other RTU equipment).
- Fill in the "Data Update Period" and "Heartbeat Period" (0 disable).
- Fill in the RS-485 configuration of the Modbus RTU device.

Main Info.	Modbus Device	FTP / Email
Server Address	192.168.1.1	
Server Port	10000	default=10000
Station ID	1	1~65535
Data Update Period(sec.)	3	0~86400 (0=disable)
Heartbeat Period(sec.)	0	1~86400 (a day)
Baud Rate (RS-485 for Modbus/RTU)	9600 v bps	
Data Bit	8 v	
Parity	N v	
Stop Bit	1 v	
Modbus Timeout (ms)	1000	50~99999, default=1000
Enable Firmware	☒ Enable	
Firmware Version	v1.0.0	
Modify		


- (8) Open the RTU Center, and then follow the steps below to add RTU devices.
 - A. Click the "New Device" icon.
 - B. Enter the alias of the GRP device
 - C. Fill in the "Station ID" as the "Station ID" of GRP device.

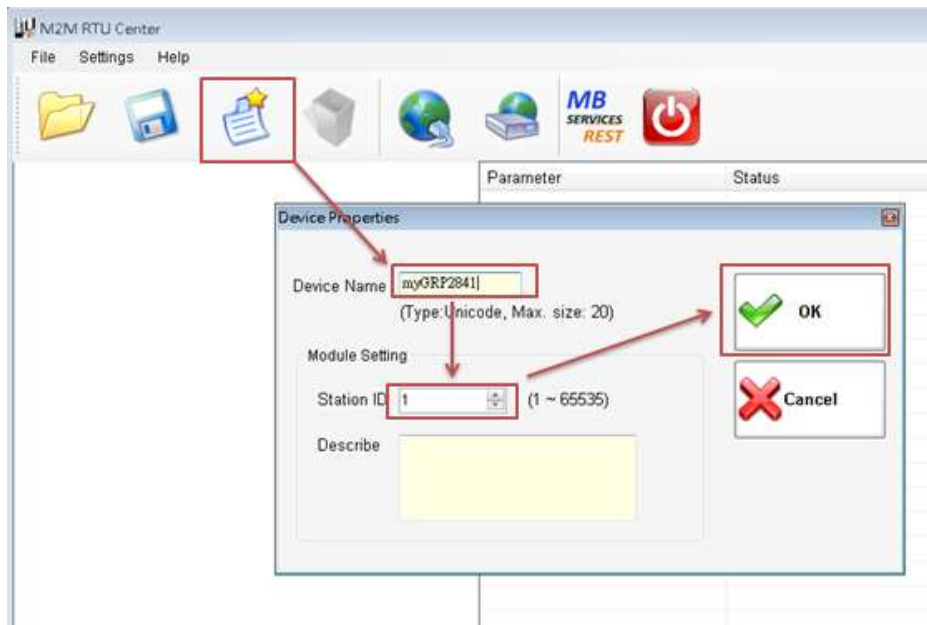


- (9) After reboot, the GRP device will automatically connect to RTU Center.



- (10) Double-click "ET-7050" to call up the "Output Control Panel", and press "DO1" to control the remote DO.

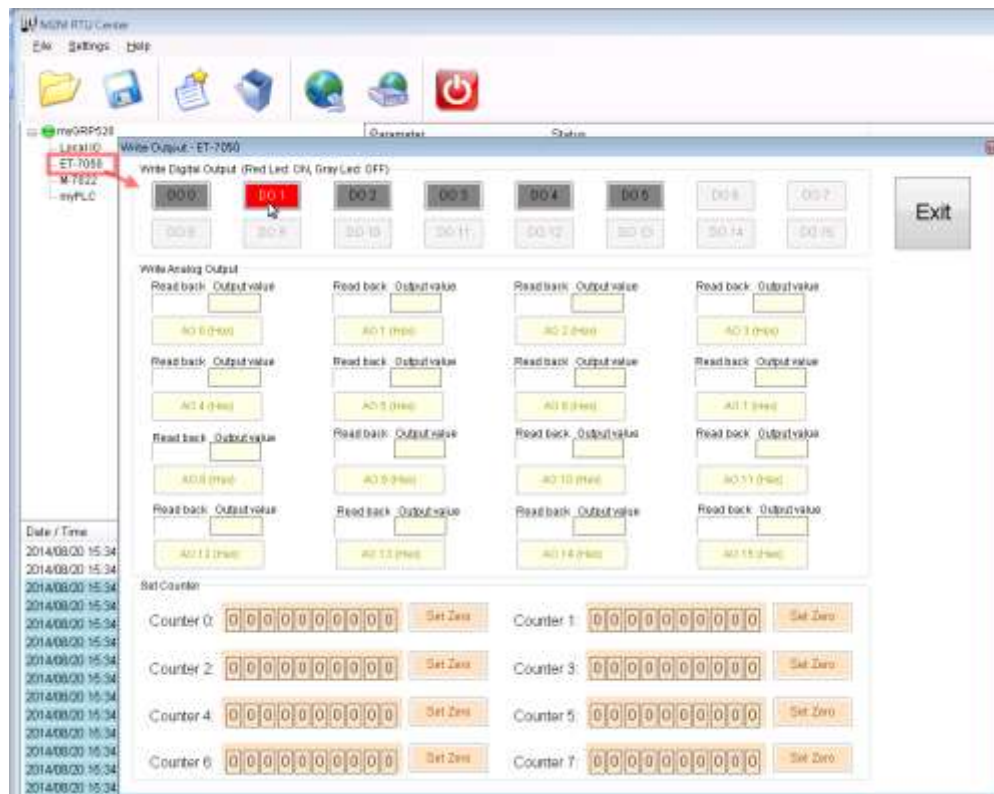



- (11) Download the RTU API from the RTU center webpage and unzip it. There are RTU API library and some C#, VB.Net, VC6 demos, as shown below.

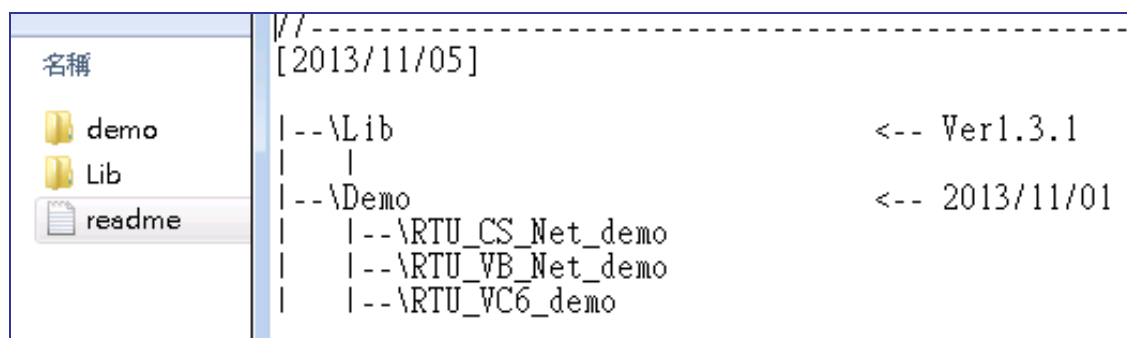

- (12) Copy the pre-built demo to the folder in the RTU Center.


The demo must be in the same folder as RTU Center, because the same memory is shared in "M2M_RTU.dll".

Here we copied "RTU_CS_demo.exe" and "M2M_RTU_NET.dll" from the C# demo.

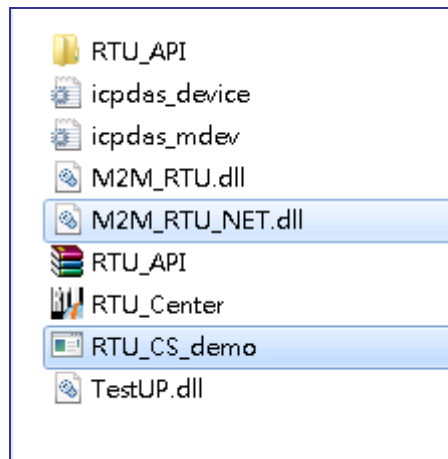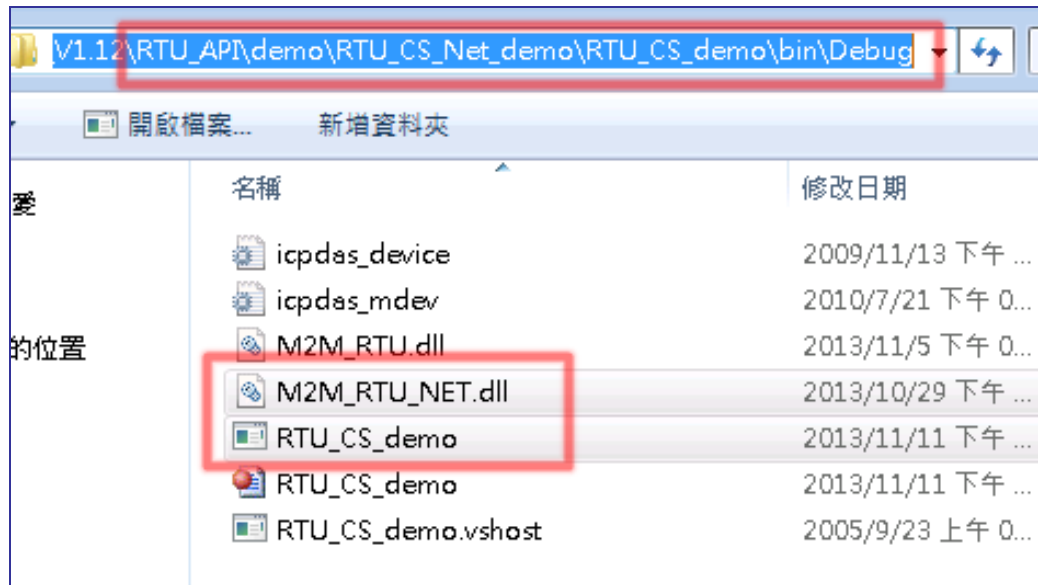



(13) Execute "RTU_CS_Demo.exe".

- Press "Get Information" to get all station information.
- Fill in the "Station ID" as the "Station ID" of GRP device.
- Press the "Read Data" button to read the local IO data. Because the GRP device has no local IO, we get the error code here.
- Fill in "Modbus ID" as "Modbus ID" of ET-7050, and "Modbus Name" as "ET-7050", and then press "ReadData" to get all IO data.
- Press the "Write Dos (add 1)" button to control DO.

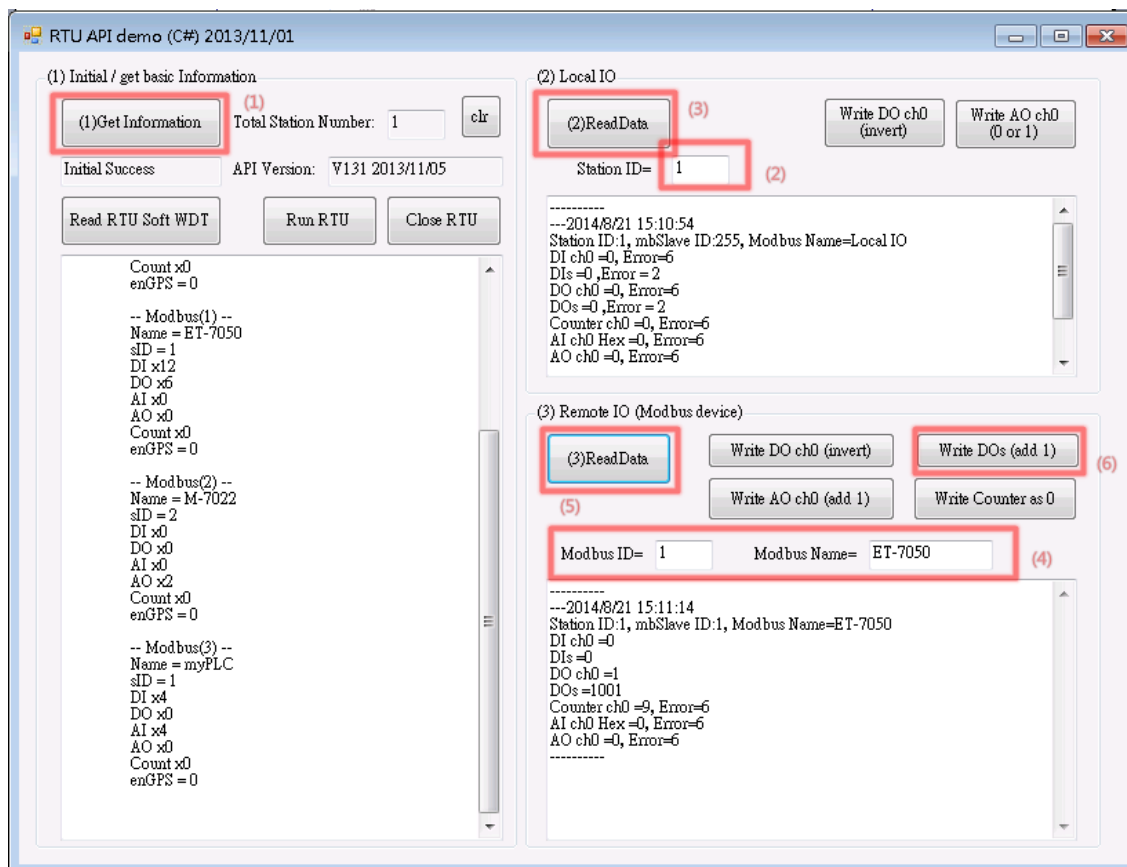


6.6 RTU Client for Remote Control Application with OPC DA Server.


- (1) For RTU Client and RTU Center, please refer to the previous section.
- (2) Open NAOPOC.M2M DA Server, and then click "Search" to automatically add all the tags of the device.

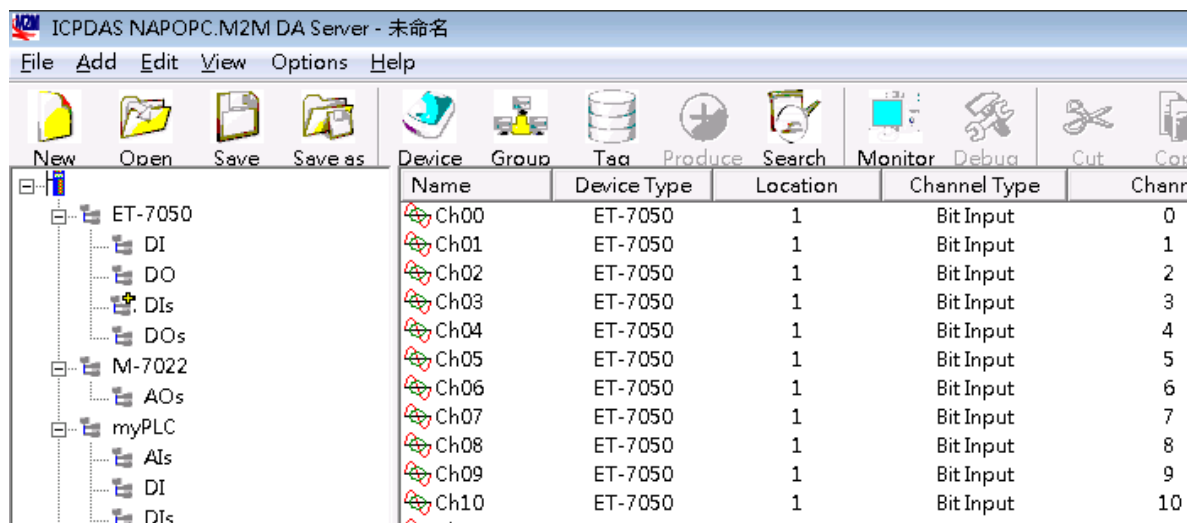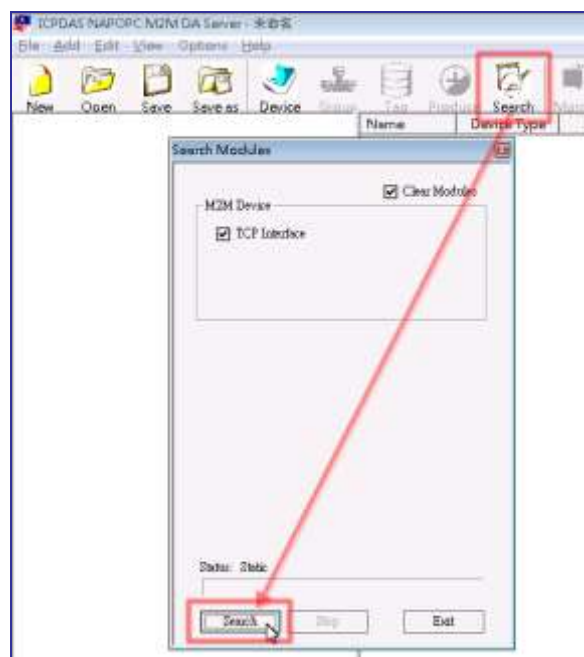

(3) Double-click the device node to modify the device name.

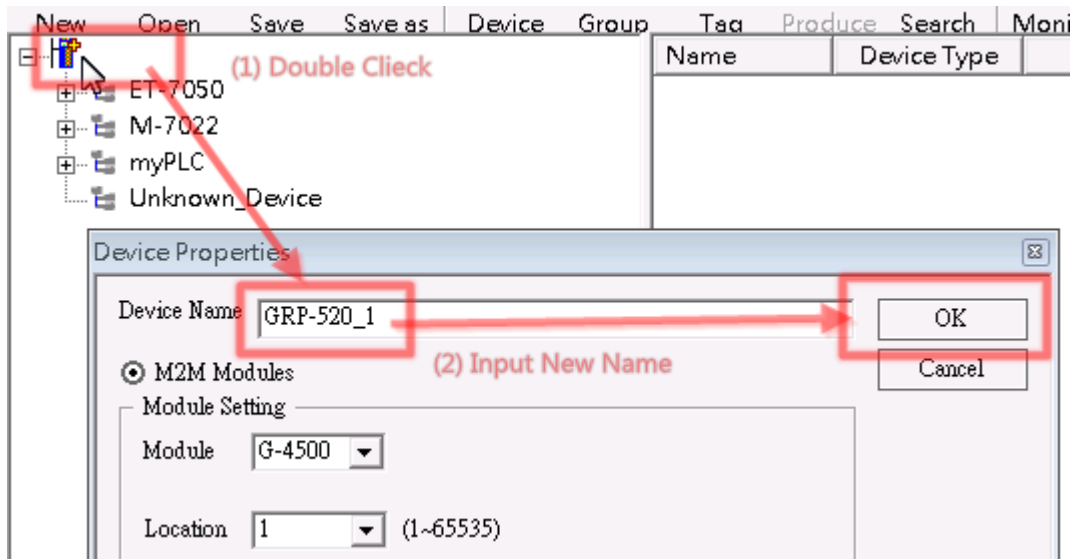


(4) Now users can use OPC Client to read I/O data from NAPOPC.M2M DA Server, or use the client "Monitor" to monitor all I/O data.

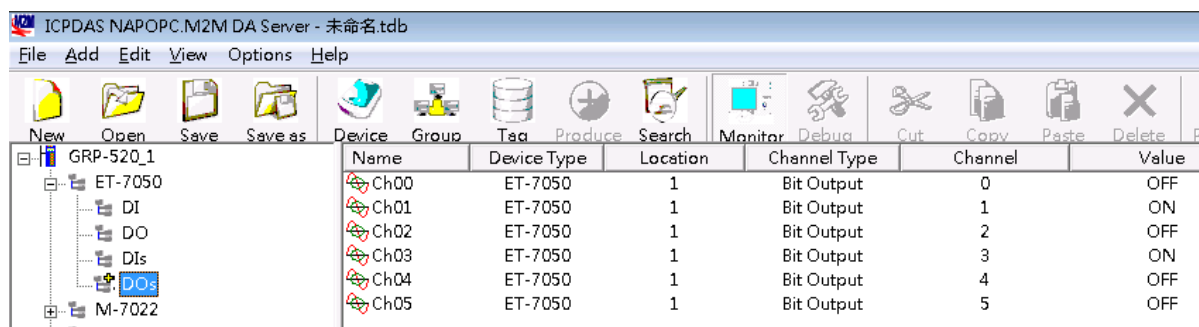

6.7 RTU Client for Remote Control Application with InduSoft.

This example shows how to use SCADA "InduSoft" to control/monitor the remote I/O.

- (1) For RTU Client, RTU Center and OPC Server, please refer to the previous section.
- (2) Right-click the OPC DA 2.05 folder and insert a new worksheet.

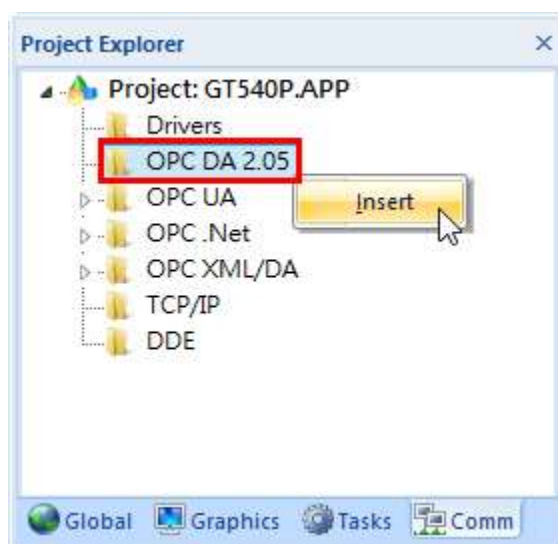

- (3) Select OPC Server from the "Server Identifier", and then select the "NAPOPC.M2M" item from the combo box.


The screenshot shows the 'OPCCL001.OPC' configuration window. The 'Server Identifier' dropdown menu is open, showing a list of options: NAPOPC.M2M, NAPOPC.M2M, NAPOPC.Svr, Studio.Scada.HDA.OPC, and Studio.Scada.OPC.2. The first two 'NAPOPC.M2M' entries are highlighted. Other fields in the window include Description, Read Update Rate (ms), Remote Server Name, Disable, Status, and checkboxes for 'Read before writing', 'Read after writing', and 'Accept Tag Name in the Item column'. At the bottom, there is a table with columns for Tag Name, Item, Scan, (Project Texts), and Add.

(4) Configure label names and item columns

A.Fill in the “Tag Name”.

B.Double-click the “Item” column and select the point from the pop-up window.

C. Click “OK”.

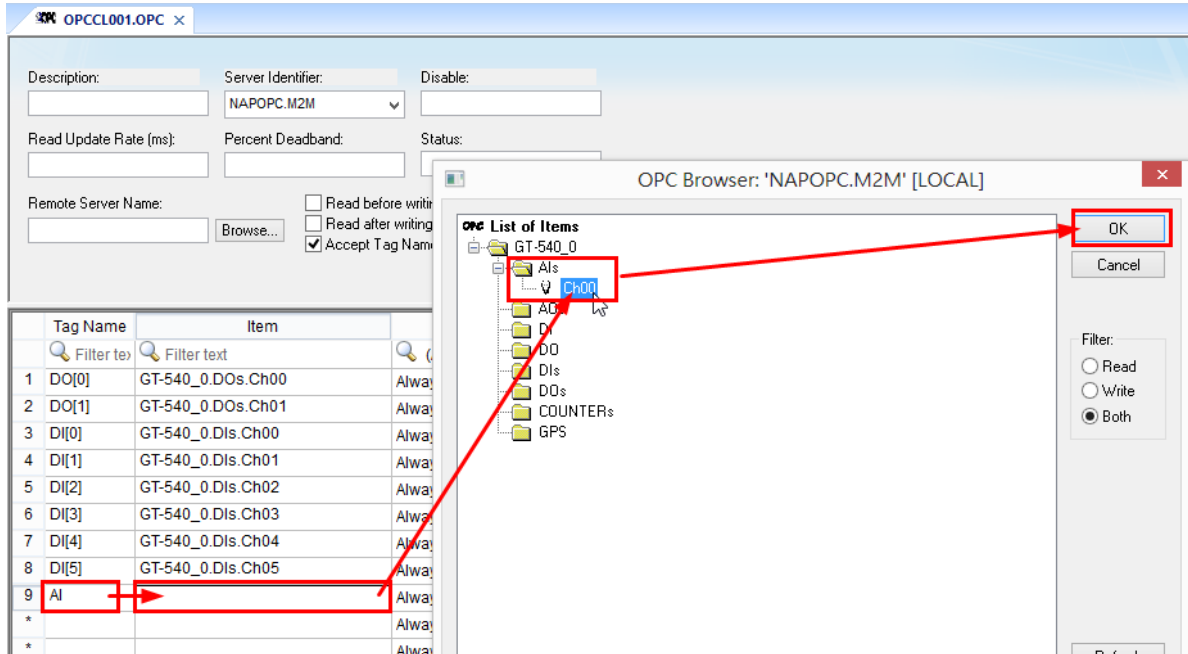

6.8 Email or FTP report I/O logger file.

This example shows how to use GRP devices to periodically report I/O recorder files.



(1) For Modbus configuration, please refer to section 4.5.

(2) Configure Email / FTP function in “Email / FTP” tab.

- A. Fill in "Data Log Interval" to record I/O data to the log file.
- B. Fill in "Max. Time per log file" to report log files.
- C. To use FTP function, fill in all setting and check "Enable FTP Function".
To use Email function, fill in all setting and check "Enable EmailFunction".
- D. Click “Modify”

Main Info.	Modbus Device	FTP / Email
Data Log Interval (sec.)	5	0~86400 (0=disable)
Max. Time per Log File (min.)	3	3~1440 minutes
FTP Server Address	192.168.1.100	empty --> disable FTP
FTP Port	221	default=21
FTP Username	test	
FTP Password	test	
Enable FTP Function	☒ Enable	
Email From	abc@gmail.com Ex: abc@gmail.com	empty --> disable Email
Email To	xyz@gmail.com	Ex: xyz@gmail.com
Example for 2 or more contact	xx@gmail.com,yy@gmail.com	
Email Server	smtp.gmail.com	Ex: smtp.gmail.com
Email Server Port	25	Ex: 25
Email Username	abc	Ex: abc
Email Password	123abc	Ex: 123abc
Enable Email Function	☐ Enable	
Modify		

(3) Finally, enable this function in the "Main Info" tab.

If the user does not need to send data to the RTU Center, set the "Data Update Period" to 0.

Main Info.	Modbus Device	FTP / Email
Server Address	192.168.1.100	
Server Port	10000	default=10000
Station ID	1	1~65535
Data Update Period(sec.)	0	0~86400 (0=disable)
Heartbeat Period(sec.)	0	1~86400 (a day)
Baud Rate (RS-485 for Modbus/RTU)	9600 ▼ bps	
Data Bit	8 ▼	
Parity	N ▼	
Stop Bit	1 ▼	
Modbus Timeout (ms)	1000	50~99999, default=1000
Enable Firmware	☒ Enable	
Alive	True	
Modify		

Appendix A. Revision History

This chapter provides revision history information to this document.

The table below shows the revision history.

Version	Date	Description of changes
1.0.0	2022-05-13	The First Release Revision.
1.1.0	2022-08-05	1. Modify the introduction content. 2. Add "Node-RED" Application. 3. Add Wi-Fi module support.
1.2.0	2023-02-09	1. Change RF Wiring Configuration. 2. Modify VxServer and VxComm description for Remote I/O Control example. 3. Modify VxServer description for Modbus TCP to Modbus RTU example.
1.3.0	2024-06-17	1. Add M2-JODY-W377-00C Wi-Fi module support.
1.3.1	2025-08-15	1. Add a description for the password change process when logging in with the default password.
1.4.1	2026-09-18	1. Modify the microSD card specification description.